
NETWORK CABLING


FIBER OPITC

NINGBO KINGDA ELECTRONICS CO.,LTD

Add: Rm 1612, 16/F, Building 1, New World Mansion,
No.1018 Min' An Rd, Ningbo,China
Tel: 0086-574-87092689/87092669
Fax: 0086-574-87092959
E-mail: hongda@kingda-ind.com
kingda@kingda-ind.com
Website: www.kingda-ind.com
www.kingda-fiber.com



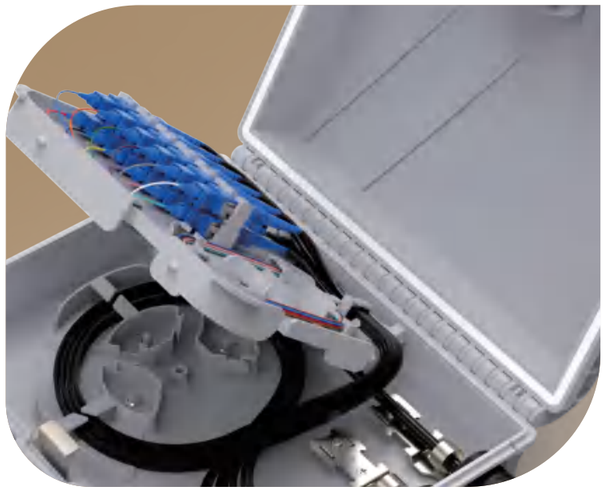

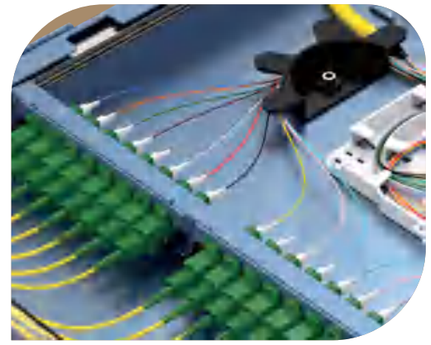



FIBER OPTIC SOLUTION PROVIDER

NINGBO KINGDA ELECTRONICS CO.,LTD

www.kingda-ind.com

COMPANY PROFILE


Ningbo Kingda Electronics Co., Ltd is specialized in manufacturing and trading audio and video peripherals, network fittings, computer peripherals, and wires and cables. We have been in this field for many years, gained a good reputation in the market with all ranges of products sold to Australia, Canada, the United States, the UK, France, Spain, Italy, and many other countries.

"Continuous innovation, competitive prices, good quality, and better services" is our target, and we are always keeping to reach that target and even further. Our studying team is applying themselves to develop new products for our partners, and enable our partners to win more markets and get more profits with our new products.

It will be our honor and pleasure to be your partner and provide the best products and service for you.






CONTENTS

MPO ULTRA HD PATCH PANEL

SLIDING MPO ULTRA HD PATCH PANELS 02

FIXED MPO ULTRA HD PATCH PANELS 05

PATCH PANELS

FIXED PATCH PANELS 10

SLIDING PATCH PANELS 16

ROTATING PATCH PANELS 25

FIBER UNIT BOX 27

MPO/SPLICING CASSETTES 30

ADAPTER PANELS 32


FIBER OPTIC TERMINATION BOXES

INDOOR FIBER OPTIC TERMINATION BOXES 37

OUTDOOR FIBER OPTIC ENCLOSURES 50

KINGDA
www.kingda-ind.com

MPO ULTRA HD PATCH PANEL

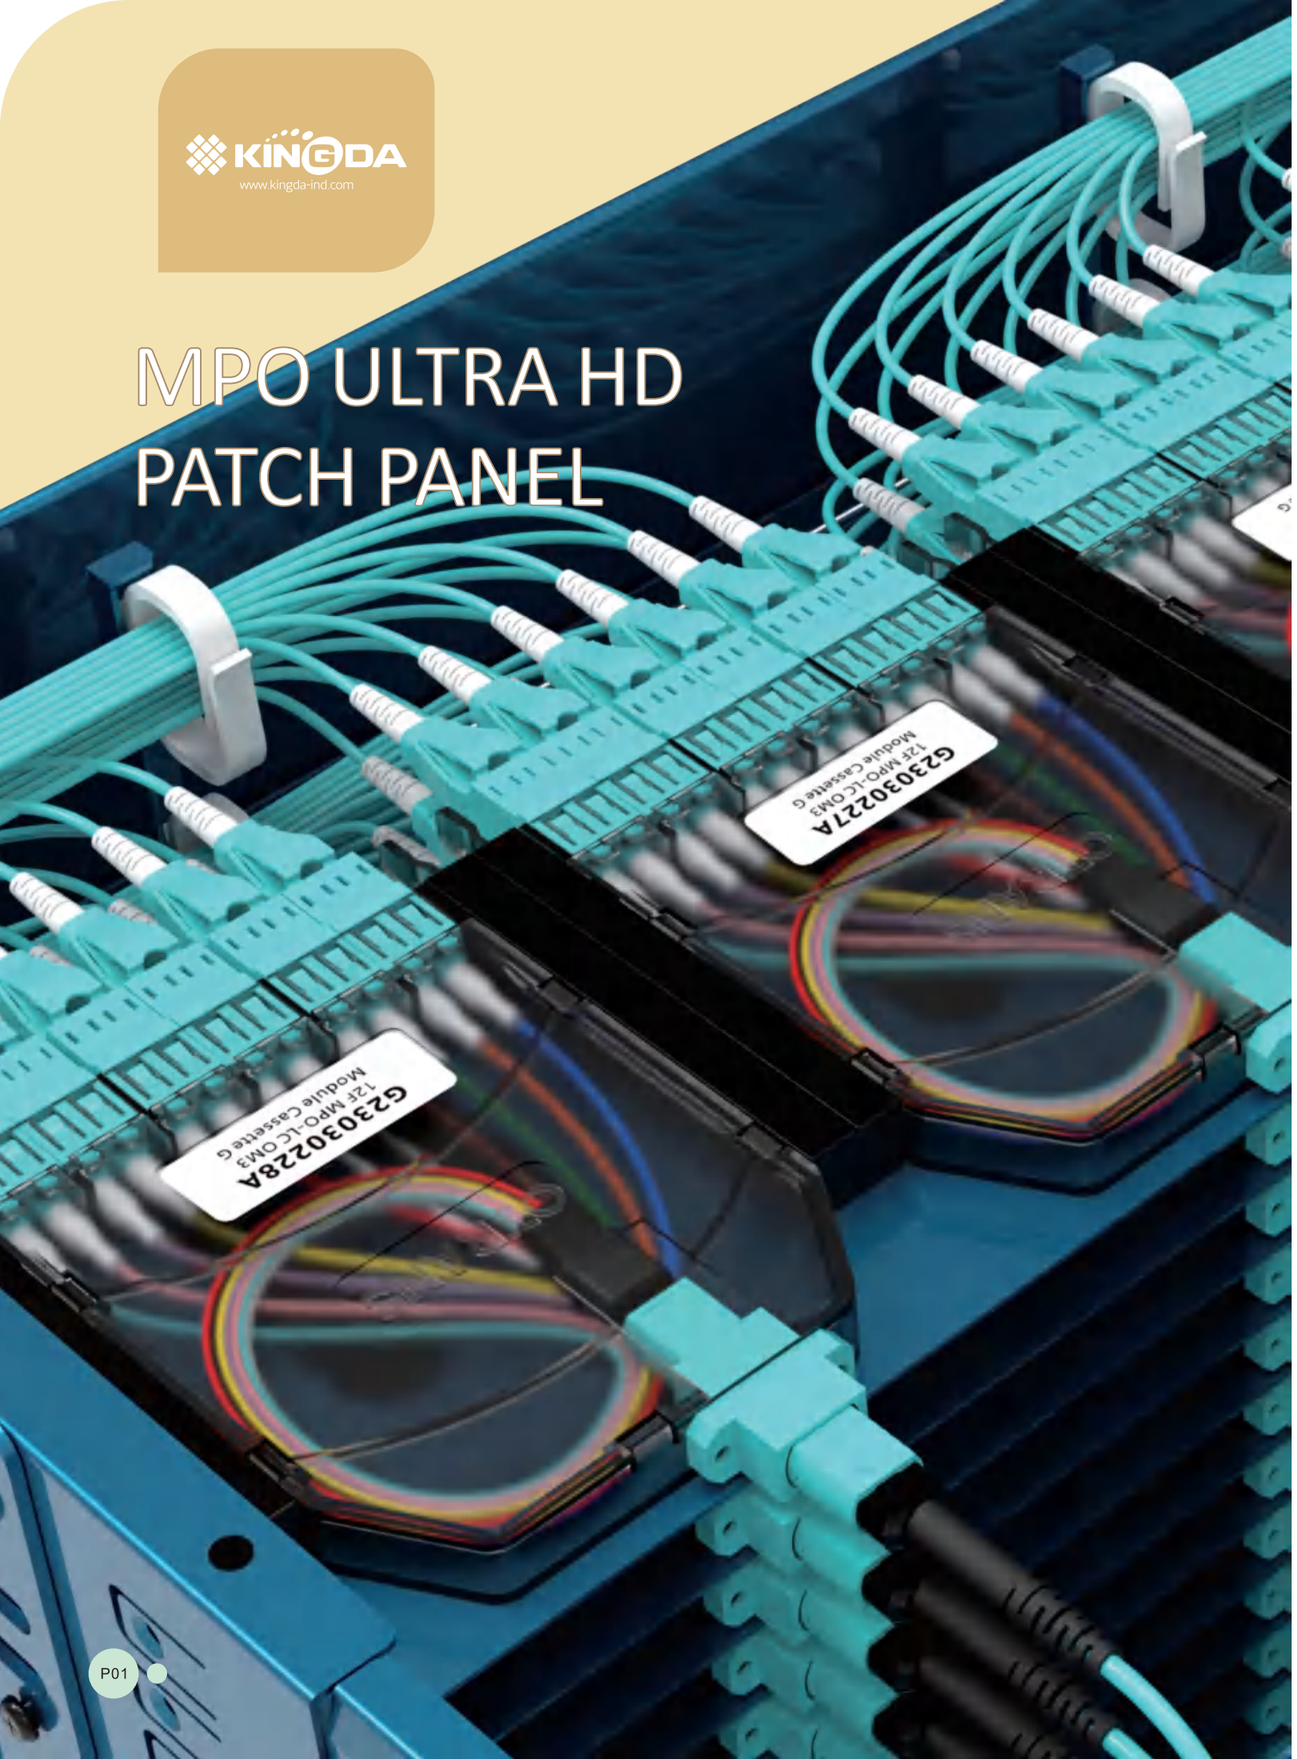

SLIDING MPO ULTRA HD PATCH PANELS

KD-SP12M1

1U MPO/Splicing Patch Panels

- Standard 19'' Width
- Height:1U, Max.144C
- MPO or Splicing Cassette Could Be Installed
- Apply to Ultra HD Cabling Management
- Dual Sliding Rail Design, Easy To Install And Maintain
- MPO/Splicing Cassette Made By Lightweight ABS
- High-Quality Metal-Processing Technology,Matte-Surface Painting
- Compact Structure,Efficient Management



MPO CASSETTE MODEL　　SPLICING CASSETTE MODEL

P/N:KD-SP12M1	Size:482.6X455X44mm	Height/Max. Cores:1U/144C	Color:Black(RAL9005)
Structure:Sliding	Cassettes:12	Accessories:Cable Ties x12, Velcro Straps x12, Spiral Tubes x6	
Inner Box:-	Q'TY/Box:-	CTN Size:630X535X115mm	Q'TY/CTN: 1PC

KD-SP6M1

1U Multi-Function Patch Panels

- Standard 19'' Width
- Height:1U, Max.144C
- MPO/Splicing Cassette or Splitters Could Be Installed
- Apply to Ultra HD Cabling Management
- Dual Sliding Rail Design, Easy To Install And Maintain
- MPO/Splicing Cassette Made By Lightweight ABS
- High-Quality Metal-Processing Technology, Matte-Surface Painting
- Compact Structure, Efficient Management



MPO CASSETTE MODEL　　SPLICING CASSETTE MODEL

P/N:KD-SP6M1	Size:482.6X455X44mm	Height/Max. Cores:1U/144C	Color:Black(RAL9005)
Structure:Sliding	Cassettes:6	Accessories:Cable Ties x12, Velcro Straps x12, Spiral Tubes x6	
Inner Box:-	Q'TY/Box:-	CTN Size:630X535X115mm	Q'TY/CTN: 1PC

KD-SP24M2

2U MPO/Splicing Patch Panels

- Standard 19'' Width
- Height:2U, Max.288C
- MPO or Splicing Cassette Could Be Installed
- Apply to Ultra HD Cabling Management
- Dual Sliding Rail Design, Easy To Install And Maintain
- MPO/Splicing Cassette Made By Lightweight ABS
- High-Quality Metal-Processing Technology, Matte-Surface Painting
- Compact Structure, Efficient Management



MPO CASSETTE MODEL　　SPLICING CASSETTE MODEL

P/N:KD-SP24M2	Size:482.6X455X88mm	Height/Max. Cores:2U/288C	Color:Black(RAL9005)
Structure:Sliding	Cassettes:24	Accessories:Cable Ties x12, Velcro Straps x12, Spiral Tubes x12	
Inner Box:-	Q'TY/Box:-	CTN Size:520X520X126mm	Q'TY/CTN: 1PC

KD-SP12M2

2U Multi-Function Patch Panels

- Standard 19'' Width
- Height:2U, Max.288C
- MPO/Splicing Cassette or Splitters Could Be Installed
- Apply to Ultra HD Cabling Management
- Dual Sliding Rail Design, Easy To Install And Maintain
- MPO/Splicing Cassette Made By Lightweight ABS
- High-Quality Metal-Processing Technology, Matte-Surface Painting
- Compact Structure, Efficient Management



MPO CASSETTE MODEL SPLICING CASSETTE MODEL

P/N:KD-SP12M2	Size:482.6X455X88mm	Height/Max. Cores:2U/288C	Color:Black(RAL9005)
Structure:Sliding	Cassettes:12	Accessories:Cable Ties x12, Velcro Straps x12, Spiral Tubes x6	
Inner Box:-	Q'TY/Box:-	CTN Size:520X520X126mm	Q'TY/CTN: 1PC

KD-SP48M4

4U MPO/Splicing Patch Panels

- Standard 19'' Width
- Height:4U, Max.576C
- MPO or Splicing Cassette Could Be Installed
- Apply to Ultra HD Cabling Management
- Dual Sliding Rail Design, Easy To Install And Maintain
- MPO/Splicing Cassette Made By Lightweight ABS
- High-Quality Metal-Processing Technology, Matte-Surface Painting
- Compact Structure, Efficient Management

MPO CASSETTE MODEL SPLICING CASSETTE MODEL

P/N:KD-SP48M4	Size:482.6X455X177mm	Height/Max. Cores:4U/576C	Color:Black(RAL9005)
Structure:Sliding	Cassettes:48	Accessories:Cable Ties x24, Velcro Straps x24,Spiral Tubes x24	
Inner Box:-	Q'TY/Box:-	CTN Size:520X520X250mm	Q'TY/CTN: 1PC

KD-SP24M4

4U Multi-Function Patch Panels

- Standard 19'' Width
- Height:4U, Max.576C
- MPO/Splicing Cassette or Splitters Could Be Installed
- Apply to Ultra HD Cabling Management
- Dual Sliding Rail Design, Easy To Install And Maintain
- MPO/Splicing Cassette Made By Lightweight ABS
- High-Quality Metal-Processing Technology, Matte-Surface Painting
- Compact Structure, Efficient Management



MPO CASSETTE MODEL SPLICING CASSETTE MODEL

P/N:KD-SP24M4	Size:482.6X455X177mm	Height/Max. Cores:4U/576C	Color:Black(RAL9005)
Structure:Sliding	Cassettes:24	Accessories:Cable Ties x24, Velcro Straps x24,Spiral Tubes x12	
Inner Box:-	Q'TY/Box:-	CTN Size:520X520X250mm	Q'TY/CTN: 1PC

SLIDING MPO ULTRA HD PATCH PANELS

KD-SF4M1

Sliding MPO Patch Panels

- Standard 19'' Width
- Height:1U, Max.96C
- Sliding Plate
- MPO/Splicing Cassette Made By Lightweight ABS
- High-Quality Metal-Processing Technology, Matte-Surface Painting
- Compact Structure, Efficient Management



P/N:KD-SF4M1	Size:482.6X327X43.6mm	Height/Max. Cores:1U/96C	Color:Black(RAL9005)
Structure:Sliding Model	Cassettes:4	Accessories:Cable Ties x6, Velcro Straps x6, Cabling Ring x2	
Inner Box:490X370X50mm	Q'TY/Box:1PC	CTN Size:510X290X390mm	Q'TY/CTN:5PCS

KD-SM4M1

Sliding MPO Patch Panels

- Standard 19'' Width
- Height:1U, Max.96C
- Sliding Plate
- MPO/Splicing Cassette Made By Lightweight ABS
- High-Quality Metal-Processing Technology, Matte-Surface Painting
- Compact Structure, Efficient Management



P/N:KD-SM4M1	Size:482.6X423X44mm	Height/Max. Cores:1U/96C	Color:Black(RAL9005)
Structure:Sliding Model	Cassettes:4	Accessories:Cable Ties x6, Velcro Straps x6, Cabling Ring x2	
Inner Box:510X455X50mm	Q'TY/Box:1PC	CTN Size:525X470X285mm	Q'TY/CTN:5PCS

KD-SM8M2

Sliding MPO Patch Panels

- Standard 19'' Width
- Height:2U, Max.192C
- MPO Cassette Installed
- Apply to Ultra HD Cabling Management
- Sliding Plate
- MPO/Splicing Cassette Made By Lightweight ABS
- High-Quality Metal-Processing Technology, Matte-Surface Painting
- Compact Structure, Efficient Management



P/N:KD-SM8M2	Size:482.6X423X88mm	Height/Max. Cores:2U/192C	Color:Black(RAL9005)
Structure:Sliding Model	Cassettes:8	Accessories:Cable Ties x6, Velcro Straps x6, Cabling Ring x2	
Inner Box:-	Q'TY/Box:-	CTN Size:525X470X285mm	Q'TY/CTN:3PCS

KD-SPF12M1

1U MPO/Splicing Fixed Patch Panels

- Standard 19'' Width
- Height:1U, Max.144C
- MPO or Splicing Cassette Could Be Installed
- Apply to Ultra HD Cabling Management
- Fixed Model Design, Economic And Practical
- MPO/Splicing Cassette Made By Lightweight ABS
- High-Quality Metal-Processing Technology, Matte-Surface Painting
- Compact Structure, Efficient Management



MPO CASSETTE MODEL SPLICING CASSETTE MODEL

P/N:KD-SPF12M1	Size:482.6X371.2X44mm	Height/Max. Cores:1U/144C	Color:Black(RAL9005)
Structure:Fixed Model	Cassettes:12	Accessories:Cable Ties x12, Velcro Straps x12,Spiral Tubes x6	
Inner Box:535X325X50mm	Q'TY/Box:1PC	CTN Size:550X275X345mm	Q'TY/CTN:5PCS

KD-SPF6M1

4U Multi-Function Fixed Patch Panels

- Standard 19'' Width
- Height:4U, Max.576C
- MPO/Splicing Cassette or Splitters Could Be Installed
- Apply to Ultra HD Cabling Management
- Fixed Model Design, Economic And Practical
- MPO/Splicing Cassette Made By Lightweight ABS
- High-Quality Metal-Processing Technology, Matte-Surface Painting
- Compact Structure, Efficient Management



MPO CASSETTE MODEL SPLICING CASSETTE MODEL

P/N:KD-SPF6M1	Size:482.6X371.2X44mm	Height/Max. Cores:4U/576C	Color:Black(RAL9005)
Structure:Fixed Model	Cassettes:6	Accessories:Cable Ties x12, Velcro Straps x12,Spiral Tubes x6	
Inner Box:535X325X50mm	Q'TY/Box:1PC	CTN Size:550X275X345mm	Q'TY/CTN:5PCS

KD-SPF24M2

2U MPO/Splicing Fixed Patch Panels

- Standard 19'' Width
- Height:2U, Max.288C
- MPO or Splicing Cassette Could Be Installed
- Apply to Ultra HD Cabling Management
- Fixed Model Design, Economic And Practical
- MPO/Splicing Cassette Made By Lightweight ABS
- High-Quality Metal-Processing Technology, Matte-Surface Painting
- Compact Structure, Efficient Management



MPO CASSETTE MODEL SPLICING CASSETTE MODEL

P/N:KD-SPF24M2	Size:482.6X371.2X88mm	Height/Max. Cores:2U/288C	Color:Black(RAL9005)
Structure:Fixed Model	Cassettes:24	Accessories:Cable Ties x12, Velcro Straps x12,Spiral Tubes x12	
Inner Box:535X405X95mm	Q'TY/Box:1PC	CTN Size:550X420X305mm	Q'TY/CTN:3PCS

KD-SPF12M2

2U Multi-Function Fixed Patch Panels

- Standard 19'' Width
- Height:2U, Max.288C
- MPO/Splicing Cassette or Splitters Could Be Installed
- Apply to Ultra HD Cabling Management
- Fixed Model Design, Economic And Practical
- MPO/Splicing Cassette Made By Lightweight ABS
- High-Quality Metal-Processing Technology, Matte-Surface Painting
- Compact Structure, Efficient Management



MPO CASSETTE MODEL SPLICING CASSETTE MODEL

P/N:KD-SPF12M2	Size:482.6X371.2X88mm	Height/Max. Cores:2U/288C	Color:Black(RAL9005)
Structure:Fixed Model	Cassettes:12	Accessories:Cable Ties x12, Velcro Straps x12,Spiral Tubes x12	
Inner Box:535X405X95mm	Q'TY/Box:1PC	CTN Size:550X420X305mm	Q'TY/CTN:3PCS

KD-SPF48M4

4U MPO/Splicing Fixed Patch Panels

- Standard 19'' Width
- Height:4U, Max.576C
- MPO or Splicing Cassette Could Be Installed
- Apply to Ultra HD Cabling Management
- Fixed Model Design, Economic And Practical
- MPO/Splicing Cassette Made By Lightweight ABS
- High-Quality Metal-Processing Technology, Matte-Surface Painting
- Compact Structure, Efficient Management




MPO CASSETTE MODEL SPLICING CASSETTE MODEL

P/N:KD-SPF48M4	Size:482.6X455X177mm	Height/Max. Cores:4U/576C	Color:Black(RAL9005)
Structure:Fixed Model	Cassettes:48	Accessories:Cable Ties x24, Velcro Straps x24,Spiral Tubes x24	
Inner Box:-	Q'TY/Box:-	CTN Size:520X520X250mm	Q'TY/CTN:1PC

KD-SPF24M4

4U Multi-Function Fixed Patch Panels

- Standard 19'' Width
- Height:4U, Max.576C
- MPO/Splicing Cassette or Splitters Could Be Installed
- Apply to Ultra HD Cabling Management
- Fixed Model Design, Economic And Practical
- MPO/Splicing Cassette Made By Lightweight ABS
- High-Quality Metal-Processing Technology, Matte-Surface Painting
- Compact Structure, Efficient Management

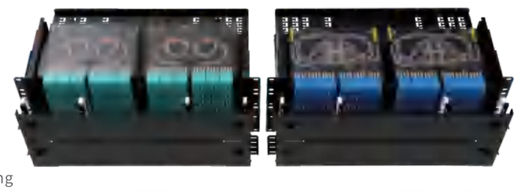

MPO CASSETTE MODEL SPLICING CASSETTE MODEL

P/N:KD-SPF24M4	Size:482.6X455X177mm	Height/Max. Cores:4U/576C	Color:Black(RAL9005)
Structure:Fixed Model	Cassettes:24	Accessories:Cable Ties x24, Velcro Straps x24,Spiral Tubes x12	
Inner Box:-	Q'TY/Box:-	CTN Size:520X520X250mm	Q'TY/CTN:1PC

KD-FM4M1

Fixed MPO Patch Panels

- Standard 19'' Width
- Height:1U, Max.96C
- Fixed Model Design, Economic And Practical
- MPO/Splicing Cassette Made By Lightweight ABS
- High-Quality Metal-Processing Technology, Matte-Surface Painting
- Compact Structure, Efficient Management



P/N:KD-FM4M1	Size:482.6X256X44mm	Height/Max. Cores:1U/96C	Color:Black(RAL9005)
Structure:Fixed Model	Cassettes:4	Accessories:Cable Ties x6, Velcro Straps x6,Cabling Ring x2	
Inner Box:450X330X50mm	Q'TY/Box:1PC	CTN Size:470X290X350mm	Q'TY/CTN:5PCS

KD-FM8M2

Multi-Function MPO Patch Panels

- Standard 19'' Width
- Height:2U, Max.192C
- MPO Cassette Installed
- Apply to Ultra HD Cabling Management
- Fixed Model Design, Economic And Practical
- MPO/Splicing Cassette Made By Lightweight ABS
- High-Quality Metal-Processing Technology, Matte-Surface Painting
- Compact Structure, Efficient Management



P/N:KD-FM8M2	Size:482.6X257X88mm	Height/Max. Cores:2U/192C	Color:Black(RAL9005)
Structure:Fixed Model	Cassettes:8	Accessories:Cable Ties x6, Velcro Straps x6, Cabling Ring x2	
Inner Box:535X325X95mm	Q'TY/Box:1PC	CTN Size:550X305X345mm	Q'TY/CTN:3PCS

KD-FM12M3

Fixed MPO Patch Panels

- Standard 19'' Width
- Height:3U, Max.288C
- Fixed Model Design, Economic And Practical
- MPO/Splicing Cassette Made By Lightweight ABS
- High-Quality Metal-Processing Technology, Matte-Surface Painting
- Compact Structure, Efficient Management



P/N:KD-FM12M3	Size:482.6X426X130mm	Height/Max. Cores:3U/288C	Color:Black(RAL9005)
Structure:Fixed Model	Cassettes:12	Accessories:Cable Ties x6, Velcro Straps x6, Cabling ring x2	
Inner Box:-	Q'TY/Box:-	CTN Size:505X485X185mm	Q'TY/CTN:1PC

KD-FM16M4

Fixed MPO Patch Panels

- Standard 19'' Width
- Height:4U, Max.384C
- MPO Cassette Included
- Apply to Ultra HD Cabling Management
- Fixed Model Design, Economic And Practical
- MPO/Splicing Cassette Made By Lightweight ABS
- High-Quality Metal-Processing Technology, Matte-Surface Painting
- Compact Structure, Efficient Management



P/N:KD-FM16M4	Size:482.6X430.4X177mm	Height/Max. Cores:4U/384C	Color:Black(RAL9005)
Structure:Fixed Model	Cassettes:16	Accessories:Cable Ties x6, Velcro Straps x6, Cabling Ring x2	
Inner Box:-	Q'TY/Box:-	CTN Size:560X495X240mm	Q'TY/CTN:1PC


KD-PE4M1

Fixed MPO Patch Panels

- Standard 19'' Width
- Height:2U, Max.192C
- MPO Cassette Included
- Apply to Ultra HD Cabling Management
- Fixed Model
- MPO/Splicing Cassette Made By Lightweight ABS
- High-Quality Metal-Processing Technology, Matte-Surface Painting
- Compact Structure, Efficient Management



P/N:KD-PE4M1	Size:482.6X423X88mm	Height/Max. Cores:2U/192C	Color:Black(RAL9005)
Structure:Fixed Model	Cassettes:8	Accessories:Cable Ties x6, Velcro Straps x6, Cabling Ring x2	
Inner Box:-	Q'TY/Box:-	CTN Size:525X470X285mm	Q'TY/CTN:3PCS

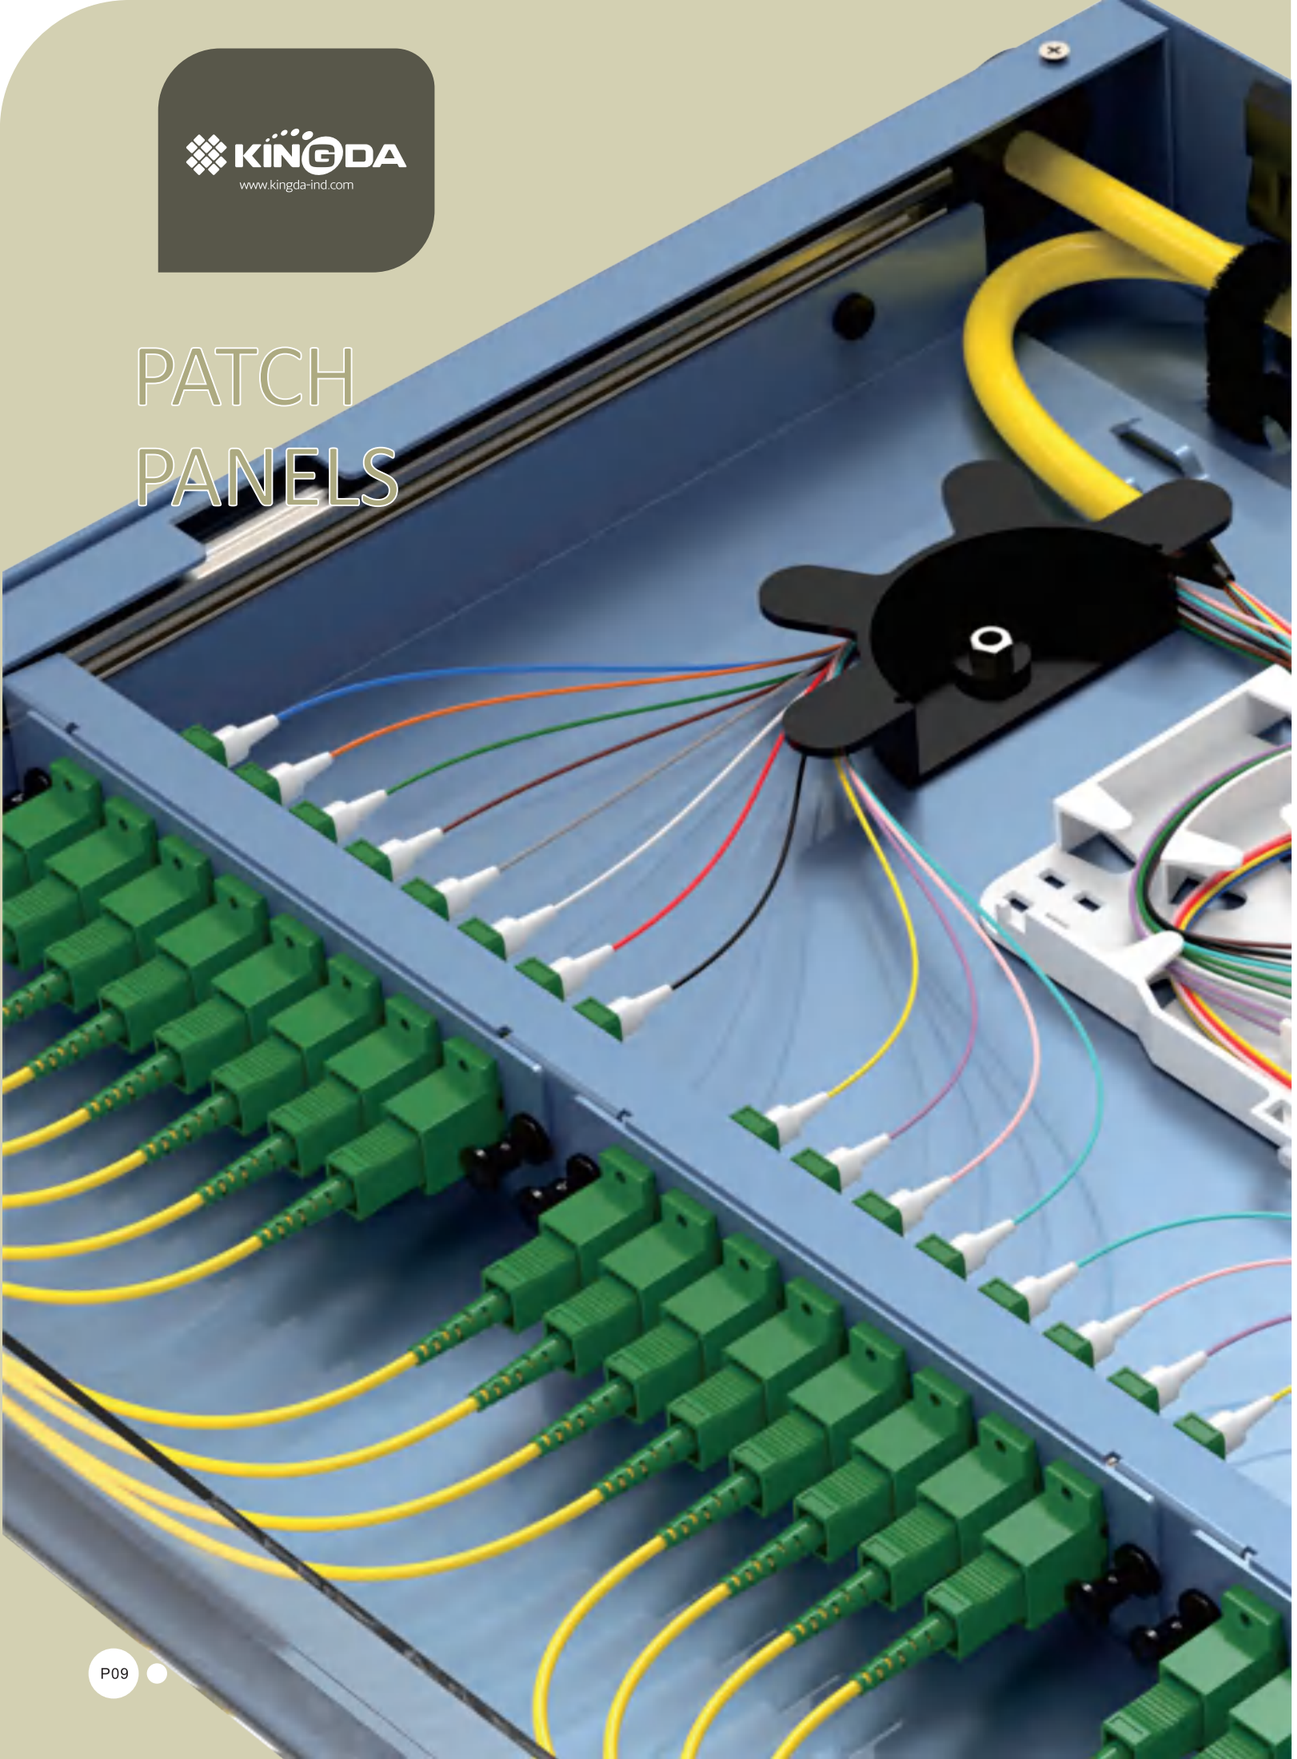

PATCH PANELS

KD-FM3D1

Fixed Patch Panels

- Standard 19'' Width
- Height:1U, Max.72C
- Fixed Model Design, Economic And Practical
- Used For Splicing Fiber
- High-Quality Metal-Processing Technology, Matte-Surface Painting
- Compact Structure, Efficient Management



P/N:KD-FM3D1	Size:482.6X256X44mm	Height/Max. Cores:1U/72C	Color:Black(RAL9005)
Structure:Fixed Model	Cassettes:3	Accessories:Cable Ties x6, Velcro Straps x6, Cabling Ring x2, Shrink Tubes	
Inner Box:450X330X50mm	Q'TY/Box:1PC	CTN Size:470X290X350mm	Q'TY/CTN:5PCS

KD-FM4H1

Fixed Patch Panels

- Standard 19'' Width
- Height:1U, Max.96C
- Fixed Model Design, Economic And Practical
- Used For Splicing Fiber
- High-Quality Metal-Processing Technology, Matte-Surface Painting
- Compact Structure, Efficient Management



P/N:KD-FM4H1	Size:482.6X256X44mm	Height/Max. Cores:1U/96C	Color:Black(RAL9005)
Structure:Fixed Model	Cassettes:4	Accessories:Cable Ties x6, Velcro Straps x6, Cabling Ring x2, Shrink Tubes	
Inner Box:450X330X50mm	Q'TY/Box:1PC	CTN Size:470X290X390mm	Q'TY/CTN:5PCS

KD-FM4G1

Fixed Patch Panels

- Standard 19'' Width
- Height:1U, Max.72C
- Fixed Model Design, Economic And Practical
- Used For Splicing Fiber
- High-Quality Metal-Processing Technology, Matte-Surface Painting
- Compact Structure, Efficient Management



P/N:KD-FM4G1	Size:482.6X256X44mm	Height/Max. Cores:1U/72C	Color:Black(RAL9005)
Structure:Fixed Model	Cassettes:4	Accessories:Cable Ties x6, Velcro Straps x6, Cabling Ring x2, Shrink Tubes	
Inner Box:450X330X50mm	Q'TY/Box:1PC	CTN Size:470X290X350mm	Q'TY/CTN:5PCS

KD-FM12G3

Fixed Patch Panels

- Standard 19'' Width
- Height:3U, Max.288C
- Fixed Model Design, Economic And Practical
- Used For Splicing Fiber
- High-Quality Metal-Processing Technology, Matte-Surface Painting
- Compact Structure, Efficient Management



P/N:KD-FM12G3	Size:482.6X426X44mm	Height/Max. Cores:3U/288C	Color:Black(RAL9005)
Structure:Fixed Model	Cassettes:12	Accessories:Cable Ties x6, Velcro Straps x6, Cabling Ring x2, Shrink Tubes	
Inner Box:-	Q'TY/Box:-	CTN Size:505X485X185mm	Q'TY/CTN:1PC

KD-FM16G4

Fixed Patch Panels

- Standard 19'' Width
- Height:4U, Max.384C
- Fixed Model Design, Economic And Practical
- Used For Splicing Fiber
- High-Quality Metal-Processing Technology, Matte-Surface Painting
- Compact Structure, Efficient Management



P/N:KD-FM16G4	Size:482.6X430.4X177mm	Height/Max. Cores:4U/384C	Color:Black(RAL9005)
Structure:Fixed Model	Cassettes:16	Accessories:Cable Ties x6, Velcro Straps x6, Cabling Ring x2, Shrink Tubes	
Inner Box:-	Q'TY/Box:-	CTN Size:560X490X240mm	Q'TY/CTN:1PC

KD-FA1G1

Fixed Patch Panels

- Standard 19'' Width
- Height:1U, Max.48C
- Fixed Model Design, Economic And Practical
- Used For Splicing Fiber
- High-Quality Metal-Processing Technology, Matte-Surface Painting
- Compact Structure, Efficient Management



P/N:KD-FA1G1	Size:482.6X241.1X43.6mm	Height/Max. Cores:1U/48C	Color:Black(RAL9005)
Structure:Fixed Model	Cassettes:1	Accessories:Cable Ties x6, Velcro Straps x6, Cabling Ring x2, Shrink Tubes	
Inner Box:535X325X50mm	Q'TY/Box:1PC	CTN Size:550X275X345mm	Q'TY/CTN:5PCS

KD-FA4D1

Fixed Patch Panels

- Standard 19'' Width
- Height:1U, Max.48C
- Fixed Model Design, Economic And Practical
- Used For Splicing Fiber
- High-Quality Metal-Processing Technology, Matte-Surface Painting
- Compact Structure, Efficient Management



P/N:KD-FA4D1	Size:482.6X341.6X44mm	Height/Max. Cores:1U/48C	Color:Black(RAL9005)
Structure:Fixed Model	Cassettes:4	Accessories:Cable Ties x6, Velcro Straps x6, Cabling Ring x2, Shrink Tubes	
Inner Box:520X370X50mm	Q'TY/Box:1PC	CTN Size:540X290X390mm	Q'TY/CTN:5PCS

FD-FA1H1

Fixed Patch Panels

- Standard 19'' Width
- Height:1U, Max.48C
- Fixed Model Design, Economic And Practical
- Used For Splicing Fiber
- High-Quality Metal-Processing Technology, Matte-Surface Painting
- Compact Structure, Efficient Management



P/N:KD-FA1H1	Size:482.6X341.6X44mm	Height/Max. Cores:1U/48C	Color:Black(RAL9005)
Structure:Fixed Model	Cassettes:1	Accessories:Cable Ties x6, Velcro Straps x6, Cabling Ring x2, Shrink Tubes	
Inner Box:520X370X50mm	Q'TY/Box:1PC	CTN Size:540X290X390mm	Q'TY/CTN:5PCS

KD-FA1H2

Fixed Patch Panels

- Standard 19'' Width
- Height:2U, Max.96C
- Fixed Model Design, Economic And Practical
- Used For Splicing Fiber
- High-Quality Metal-Processing Technology, Matte-Surface Painting
- Compact Structure, Efficient Management



P/N:KD-FA1H2	Size:482.6X231.5X88mm	Height/Max. Cores:2U/96C	Color:Black(RAL9005)
Structure:Fixed Model	Cassettes:1	Accessories:Cable Ties x6, Velcro Straps x6, Cabling Ring x2, Shrink Tubes	
Inner Box:535X325X95mm	Q'TY/Box:1PCS	CTN Size:550X305X345mm	Q'TY/CTN:3PCS

KD-FR1C1

Fixed Patch Panels

- Standard 19'' Width
- Height:1U, Max.48C
- Fixed Model Design, Economic And Practical
- Used For Splicing Fiber
- High-Quality Metal-Processing Technology, Matte-Surface Painting
- Compact Structure, Efficient Management



P/N:KD-FR1C1	Size:482.6X231.7X44mm	Height/Max. Cores:1U/48C	Color:Black(RAL9005)
Structure:Fixed Model	Cassettes:1	Accessories:Cable Ties x6, Velcro Straps x6, Cabling Ring x2, Shrink Tubes	
Inner Box:450X330X50mm	Q'TY/Box:1PC	CTN Size:470X290X350mm	Q'TY/CTN:5PCS

KD-FR2C1

Fixed Patch Panels

- Standard 19'' Width
- Height:1U, Max.48C
- Fixed Model Design, Economic And Practical
- Used For Splicing Fiber
- High-Quality Metal-Processing Technology, Matte-Surface Painting
- Compact Structure, Efficient Management



P/N:KD-FR2C1	Size:482.6X325X43mm	Height/Max. Cores:1U/48C	Color:Black(RAL9005)
Structure:Fixed Model	Cassettes:2	Accessories:Cable Ties x6, Velcro Straps x6, Cabling Ring x2, Shrink Tubes	
Inner Box:490X370X50mm	Q'TY/Box:1PC	CTN Size:510X290X390mm	Q'TY/CTN:5PCS

KD-FR2G1

Fixed Patch Panels

- Standard 19'' Width
- Height:1U, Max.48C
- Fixed Model Design, Economic And Practical
- Used For Splicing Fiber
- High-Quality Metal-Processing Technology, Matte-Surface Painting
- Compact Structure, Efficient Management



P/N:KD-FR2G1	Size:482.6X325X43mm	Height/Max. Cores:1U/48C	Color:Black(RAL9005)
Structure:Fixed Model	Cassettes:2	Accessories:Cable Ties x6, Velcro Straps x6, Cabling Ring x2, Shrink Tubes	
Inner Box:490X370X50mm	Q'TY/Box:1PC	CTN Size:510X290X390mm	Q'TY/CTN:5PCS

KD-FR2C2

Fixed Patch Panels

- Standard 19'' Width
- Height:2U, Max.96C
- Fixed Model Design, Economic And Practical
- Used For Splicing Fiber
- High-Quality Metal-Processing Technology, Matte-Surface Painting
- Compact Structure, Efficient Management



P/N:KD-FR2C2	Size:482.6X325X88mm	Height/Max. Cores:2U/96C	Color:Black(RAL9005)
Structure:Fixed Model	Cassettes:4	Accessories:Cable Ties x6, Velcro Straps x6, Cabling Ring x2, Shrink Tubes	
Inner Box:490X370X95mm	Q'TY/Box:1PC	CTN Size:510X305X390mm	Q'TY/CTN:3PCS

KD-FE3G2

Fixed Patch Panels

- Standard 19'' Width
- Height:2U, Max.96C
- Fixed Model Design, Economic And Practical
- Used For Splicing Fiber
- High-Quality Metal-Processing Technology, Matte-Surface Painting
- Compact Structure, Efficient Management



P/N:KD-FE3G2	Size:482.6X312X88mm	Height/Max. Cores:2U/96C	Color:Black(RAL9005)
Structure:Fixed Model	Cassettes:4	Accessories:Cable Ties x6, Velcro Straps x6, Cabling Ring x2, Shrink Tubes	
Inner Box:490X370X95mm	Q'TY/Box:1PC	CTN Size:510X305X390mm	Q'TY/CTN:3PCS

KD-FY2D1

Fixed Patch Panels

- Standard 19'' Width
- Height:1U, Max.48C
- Fixed Model Design, Economic And Practical
- Used For Splicing Fiber
- High-Quality Metal-Processing Technology, Matte-Surface Painting
- Compact Structure, Efficient Management



P/N:KD-FY2D1	Size:482.6X325X44mm	Height/Max. Cores:1U/48C	Color:Black(RAL9005)
Structure:Fixed Model	Cassettes:2	Accessories:Cable Ties x6, Velcro Straps x6, Cabling Ring x2, Shrink Tubes	
Inner Box:490X370X50mm	Q'TY/Box:1PC	CTN Size:510X290X390mm	Q'TY/CTN:5PCS

FIXED PATCH PANELS

KD-CR12D4

Fixed Patch Panels

- Standard 19'' Width
- Height:4U, Max.288C
- Fixed Model
- Used For Splicing Fiber
- High-Quality Metal-Processing Technology, Matte-Surface Painting
- Compact Structure, Efficient Management



P/N:KD-CR12D4	Size:410X452.5X174.4mm	Height/Max. Cores:4U/288C	Color:Black(RAL9005)
Structure:Fixed Model	Cassettes:12	Accessories:Cable Ties x12, Velcro Straps x4, Cabling Ring x10, Shrink Tubes	
Inner Box:-	Q'TY/Box:-	CTN Size:560X490X240mm	Q'TY/CTN:1PC

KD-25800-48N

48 Cores
Fiber Distribution Box




Dimensions: 155*182*475mm	Inlet/Outlet Ports: 4 in 48 out	Max. Inlet Cable Diameter: 16mm
Max. No. of Splice Tray: 6	Heat Shrink Capacity: 48	

SLIDING PATCH PANELS

KD-SR1C1

Sliding Patch Panels

- Standard 19'' Width
- Height:1U, Max.48C
- Sliding Model Design
- Used For Splicing Fiber
- High-Quality Metal-Processing Technology, Matte-Surface Painting
- Compact Structure, Efficient Management

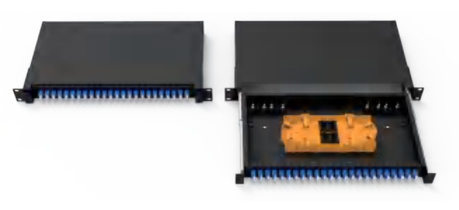

P/N:KD-SR1C1	Size:430X258X43.6mm	Height/Max. Cores:1U/48C	Color:Black(RAL9005)
Structure:Sliding Model	Cassettes:1	Accessories:Cable Ties x6, Velcro Straps x6, Shrink Tubes	
Inner Box:490X310X50mm	Q'TY/Box:1PC	CTN Size:510X280X330mm	Q'TY/CTN:3PCS

KD-SR2C1

Sliding Patch Panels

- Standard 19'' Width
- Height:1U, Max.48C
- Sliding Model Design
- Used For Splicing Fiber
- High-Quality Metal-Processing Technology, Matte-Surface Painting
- Compact Structure, Efficient Management



P/N:KD-SR2C1	Size:482.6X327X43.6mm	Height/Max. Cores:1U/48C	Color:Black(RAL9005)
Structure:Sliding Model	Cassettes:2	Accessories:Cable Ties x6, Velcro Straps x6, Cabling Ring x2, Shrink Tubes	
Inner Box:490X370X50mm	Q'TY/Box:1PC	CTN Size:510X290X390mm	Q'TY/CTN:5PCS

KD-SR2C1-SAY

Sliding Patch Panels

- Standard 19'' Width
- Height:1U, Max.48C
- Sliding Model Design
- Used For Splicing Fiber
- High-Quality Metal-Processing Technology, Matte-Surface Painting
- Compact Structure, Efficient Management



P/N:KD-SR2C1-SAY	Size:430X374X43.6mm	Height/Max. Cores:1U/48C	Color:Black(RAL9005)
Structure:Sliding Model	Cassettes:1	Accessories:Cable Ties x6, Velcro Straps x6, Shrink Tubes	
Inner Box:510X470X50mm	Q'TY/Box:1PC	CTN Size:525X490X295mm	Q'TY/CTN:3PCS

KD-SR2G1

Sliding Patch Panels

- Standard 19'' Width
- Height:1U, Max.48C
- Sliding Model Design
- Used For Splicing Fiber
- High-Quality Metal-Processing Technology, Matte-Surface Painting
- Compact Structure, Efficient Management



P/N:KD-SR2G1	Size:482.6X327X43.6mm	Height/Max. Cores:1U/48C	Color:Black(RAL9005)
Structure:Sliding Model	Cassettes:2	Accessories:Cable Ties x6, Velcro Straps x6, Cabling Ring x2, Shrink Tubes	
Inner Box:490X370X50mm	Q'TY/Box:1PC	CTN Size:510x290x390mm	Q'TY/CTN:5PCS

KD-SR3D1

Sliding Patch Panels

- Standard 19'' Width
- Height:1U, Max.48C
- Sliding Model Design
- Used For Splicing Fiber
- High-Quality Metal-Processing Technology, Matte-Surface Painting
- Compact Structure, Efficient Management



P/N:KD-SR3D1	Size:430X327X43.6mm	Height/Max. Cores:1U/48C	Color:Black(RAL9005)
Structure:Sliding Model	Cassettes:3	Accessories:Cable Ties x6, Velcro Straps x6, Shrink Tubes	
Inner Box:490X370X50mm	Q'TY/Box:1PC	CTN Size:510X290X390mm	Q'TY/CTN:5PCS

KD-SR3C1

Sliding Patch Panels

- Standard 19'' Width
- Height:1U, Max.48C
- Sliding Model Design
- Used For Splicing Fiber
- High-Quality Metal-Processing Technology, Matte-Surface Painting
- Compact Structure, Efficient Management




P/N:KD-SR3C1	Size:482.6X327X43.6mm	Height/Max. Cores:1U/48C	Color:Black(RAL9005)
Structure:Sliding Model	Cassettes:3	Accessories:Cable Ties x6, Velcro Straps x6, Cabling Ring x2, Shrink Tubes	
Inner Box:490X370X50mm	Q'TY/Box:1PC	CTN Size:510X290X390mm	Q'TY/CTN:5PCS

KD-SR2C2

Sliding Patch Panels

- Standard 19'' Width
- Height:2U, Max.96C
- Sliding Model Design
- Used For Splicing Fiber
- High-Quality Metal-Processing Technology, Matte-Surface Painting
- Compact Structure, Efficient Management

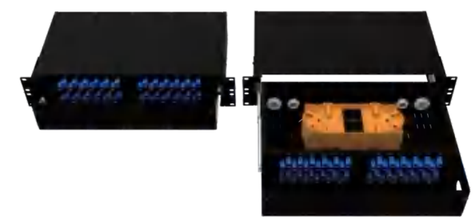


P/N:KD-SR2C2	Size:430X327X88mm	Height/Max. Cores:2U/96C	Color:Black(RAL9005)
Structure:Sliding Model	Cassettes:4	Accessories:Cable Ties x6, Velcro Straps x6, Shrink Tubes	
Inner Box:490X370X95mm	Q'TY/Box:1PC	CTN Size:510X305X390mm	Q'TY/CTN:3PCS

KD-SR3C2

Sliding Patch Panels

- Standard 19'' Width
- Height:2U, Max.96C
- Sliding Model Design
- Used For Splicing Fiber
- High-Quality Metal-Processing Technology, Matte-Surface Painting
- Compact Structure, Efficient Management

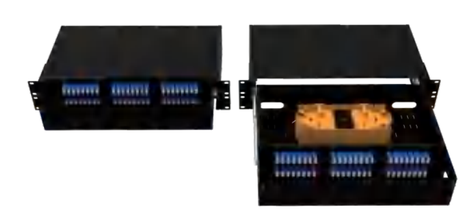

P/N:KD-SR3C2	Size:482.6X327X88mm	Height/Max. Cores:2U/96C	Color:Black(RAL9005)
Structure:Sliding Model	Cassettes:6	Accessories:Cable Ties x6, Velcro Straps x6, Cabling Ring x2, Shrink Tubes	
Inner Box:490X370X95mm	Q'TY/Box:1PC	CTN Size:510X305X390mm	Q'TY/CTN:3PCS

KD-SR2C3

Sliding Patch Panels

- Standard 19'' Width
- Height:3U, Max.144C
- Sliding Model Design
- Used For Splicing Fiber
- High-Quality Metal-Processing Technology, Matte-Surface Painting
- Compact Structure, Efficient Management



P/N:KD-SR2C3	Size:430X327X132.5mm	Height/Max. Cores:3U/144C	Color:Black(RAL9005)
Structure:Sliding Model	Cassettes:6	Accessories:Cable Ties x6, Velcro Straps x6, Cabling Ring x2, Shrink Tubes	
Inner Box:-	Q'TY/Box:-	CTN Size:450X400X145mm	Q'TY/CTN:1PC

KD-SE3G1

Sliding Patch Panels

- Standard 19'' Width
- Height:1U, Max.48C
- Sliding Model Design
- Used For Splicing Fiber
- High-Quality Metal-Processing Technology, Matte-Surface Painting
- Compact Structure, Efficient Management



P/N:KD-SE3G1	Size:482.6X358X44mm	Height/Max. Cores:1U/48C	Color:Black(RAL9005)
Structure:Sliding Model	Cassettes:3	Accessories:Cable Ties x6, Velcro Straps x6, Cabling Ring x2, Shrink Tubes	
Inner Box:490X370X50mm	Q'TY/Box:1PC	CTN Size:510X290X390mm	Q'TY/CTN:5PCS

KD-SE3H1

Sliding Patch Panels

- Standard 19'' Width
- Height:1U, Max.72C
- Sliding Model Design
- Used For Splicing Fiber
- High-Quality Metal-Processing Technology, Matte-Surface Painting
- Compact Structure, Efficient Management




P/N:KD-SE3H1	Size:482.6X358X44mm	Height/Max. Cores:1U/72C	Color:Black(RAL9005)
Structure:Sliding Model	Cassettes:3	Accessories:Cable Ties x6, Velcro Straps x6, Cabling Ring x2, Shrink Tubes	
Inner Box:490X370X50mm	Q'TY/Box:1PC	CTN Size:510X290X390mm	Q'TY/CTN:5PCS

KD-SE3C1

Sliding Patch Panels

- Standard 19'' Width
- Height:1U, Max.48C
- Sliding Model Design
- Used For Splicing Fiber
- High-Quality Metal-Processing Technology, Matte-Surface Painting
- Compact Structure, Efficient Management

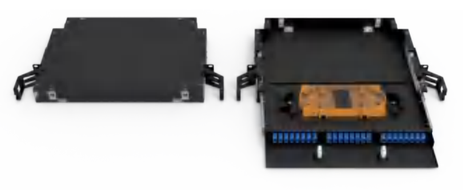

P/N:KD-SE3C1	Size:482.6X358X44mm	Height/Max. Cores:1U/48C	Color:Black(RAL9005)
Structure:Sliding Model	Cassettes:3	Accessories:Cable Ties x6, Velcro Straps x6, Cabling Ring x2, Shrink Tubes	
Inner Box:490X370X50mm	Q'TY/Box:1PC	CTN Size:510X290X390mm	Q'TY/CTN:5PCS

KD-SE3H2

Sliding Patch Panels

- Standard 19'' Width
- Height:2U, Max.144C
- Sliding Model Design
- Used For Splicing Fiber
- High-Quality Metal-Processing Technology, Matte-Surface Painting
- Compact Structure, Efficient Management



P/N:KD-SE3H2	Size:482.6X358X88mm	Height/Max. Cores:2U/144C	Color:Black(RAL9005)
Structure:Sliding Model	Cassettes:6	Accessories:Cable Ties x6, Velcro Straps x6, Cabling Ring x2, Shrink Tubes	
Inner Box:490X405X95mm	Q'TY/Box:1PC	CTN Size:510X300X425mm	Q'TY/CTN:3PCS

KD-SH1C1

Sliding Patch Panels

- Standard 19'' Width
- Height:1U, Max.48C
- Sliding Model Design
- Used For Splicing Fiber
- High-Quality Metal-Processing Technology, Matte-Surface Painting
- Compact Structure, Efficient Management



P/N:KD-SH1C1	Size:482.6X240X44mm	Height/Max. Cores:1U/48C	Color:Black(RAL9005)
Structure:Sliding Model	Cassettes:1	Accessories:Cable Ties x6, Velcro Straps x6, Shrink Tubes	
Inner Box:490X370X50mm	Q'TY/Box:1PC	CTN Size:510X290X390mm	Q'TY/CTN:5PCS

KD-SH2C1

Sliding Patch Panels

- Standard 19'' Width
- Height:1U, Max.48C
- Sliding Model Design
- Used For Splicing Fiber
- High-Quality Metal-Processing Technology, Matte-Surface Painting
- Compact Structure, Efficient Management



P/N:KD-SH2C1	Size:482.6X240X44mm	Height/Max. Cores:1U/48C	Color:Black(RAL9005)
Structure:Sliding Model	Cassettes:2	Accessories:Cable Ties x6, Velcro Straps x6, Shrink Tubes	
Inner Box:535X325X50mm	Q'TY/Box:1PC	CTN Size:550X340X270mm	Q'TY/CTN:5PCS

KD-SM4G1

Sliding Patch Panels

- Standard 19'' Width
- Height:1U, Max.48C
- Sliding Model Design
- Used For Splicing Fiber
- High-Quality Metal-Processing Technology, Matte-Surface Painting
- Compact Structure, Efficient Management



P/N:KD-SM4G1	Size:482.6X423X44mm	Height/Max. Cores:1U/48C	Color:Black(RAL9005)
Structure:Sliding Model	Cassettes:4	Accessories:Cable Ties x6, Velcro Straps x6, Shrink Tubes	
Inner Box:510X455X50mm	Q'TY/Box:1PC	CTN Size:525X470X285mm	Q'TY/CTN:5PCS

KD-SM4H1

Sliding Patch Panels

- Standard 19'' Width
- Height:1U, Max.96C
- Sliding Model Design
- Used For Splicing Fiber
- High-Quality Metal-Processing Technology, Matte-Surface Painting
- Compact Structure, Efficient Management




P/N:KD-SM4H1	Size:482.6X423X44mm	Height/Max. Cores:1U/96C	Color:Black(RAL9005)
Structure:Sliding Model	Cassettes:4	Accessories:Cable Ties x6, Velcro Straps x6, Shrink Tubes	
Inner Box:510X455X50mm	Q'TY/Box:1PC	CTN Size:525X470X285mm	Q'TY/CTN:5PCS

KD-PA1D1

Sliding Patch Panels

- Standard 19'' Width
- Height:1U, Max.48C
- Sliding Model Design
- Used For Splicing Fiber
- High-Quality Metal-Processing Technology, Matte-Surface Painting
- Compact Structure, Efficient Management

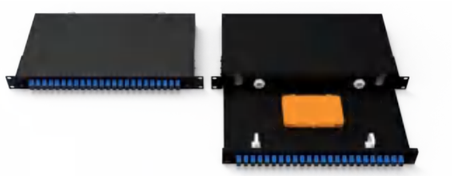

P/N:KD-PA1D1	Size:482.6X240X43.6mm	Height/Max. Cores:1U/48C	Color:Black(RAL9005)
Structure:Sliding Model	Cassettes:1	Accessories:Cable Ties x6, Velcro Straps x6, Shrink Tubes	
Inner Box:535X325X50mm	Q'TY/Box:1PC	CTN Size:550X275X345mm	Q'TY/CTN:5PCS

KD-PA3D1

Sliding Patch Panels

- Standard 19'' Width
- Height:1U, Max.72C
- Sliding Model Design
- Used For Splicing Fiber
- High-Quality Metal-Processing Technology, Matte-Surface Painting
- Compact Structure, Efficient Management



P/N:KD-PA3D1	Size:482.6X240X43.6mm	Height/Max. Cores:1U/72C	Color:Black(RAL9005)
Structure:Sliding Model	Cassettes:3	Accessories:Cable Ties x6, Velcro Straps x6, Shrink Tubes	
Inner Box:535X325X50mm	Q'TY/Box:1PC	CTN Size:550X275X345mm	Q'TY/CTN:5PCS

KD-PA1G1

Sliding Patch Panels

- Standard 19'' Width
- Height:1U, Max.48C
- Sliding Model Design
- Used For Splicing Fiber
- High-Quality Metal-Processing Technology, Matte-Surface Painting
- Compact Structure, Efficient Management




P/N:KD-PA1G1	Size:482.6X240X43.6mm	Height/Max. Cores:1U/48C	Color:Black(RAL9005)
Structure:Sliding Model	Cassettes:1	Accessories:Cable Ties x6, Velcro Straps x6, Shrink Tubes	
Inner Box:535X325X50mm	Q'TY/Box:1PC	CTN Size:550X275X345mm	Q'TY/CTN:5PCS

KD-PB1C1

Sliding Patch Panels

- Standard 19'' Width
- Height:1U, Max.48C
- Sliding Model Design
- Used For Splicing Fiber
- High-Quality Metal-Processing Technology, Matte-Surface Painting
- Compact Structure, Efficient Management

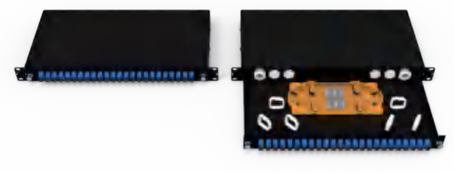


P/N:KD-PB1C1	Size:482.6X240X43.6mm	Height/Max. Cores:1U/48C	Color:Black(RAL9005)
Structure:Sliding Model	Cassettes:1	Accessories:Cable Ties x6, Velcro Straps x6, Shrink Tubes	
Inner Box:535X325X50mm	Q'TY/Box:1PC	CTN Size:550X275X345mm	Q'TY/CTN:5PCS

KD-PB1G1

Sliding Patch Panels

- Standard 19'' Width
- Height:1U, Max.48C
- Sliding Model Design
- Used For Splicing Fiber
- High-Quality Metal-Processing Technology, Matte-Surface Painting
- Compact Structure, Efficient Management

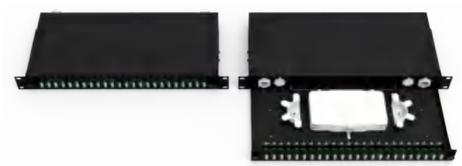


P/N:KD-PB1G1	Size:482.6X240X43.6mm	Height/Max. Cores:1U/48C	Color:Black(RAL9005)
Structure:Sliding Model	Cassettes:1	Accessories:Cable Ties x6, Velcro Straps x6, Shrink Tubes	
Inner Box:535X325X50mm	Q'TY/Box:1PC	CTN Size:550X275X345mm	Q'TY/CTN:5PCS

KD-PB3D1

Sliding Patch Panels

- Standard 19'' Width
- Height:1U, Max.48C
- Sliding Model Design
- Used For Splicing Fiber
- High-Quality Metal-Processing Technology, Matte-Surface Painting
- Compact Structure, Efficient Management

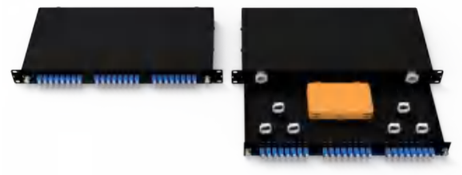


P/N:KD-PB3D1	Size:482.6X223.5X43.6mm	Height/Max. Cores:1U/48C	Color:Black(RAL9005)
Structure:Sliding Model	Cassettes:3	Accessories:Cable Ties x6, Velcro Straps x6, Shrink Tubes	
Inner Box:535X325X50mm	Q'TY/Box:1PC	CTN Size:550X275X345mm	Q'TY/CTN:5PCS

KD-PB1H1

Sliding Patch Panels

- Standard 19'' Width
- Height:1U, Max.96C
- Sliding Model Design
- Used For Splicing Fiber
- High-Quality Metal-Processing Technology, Matte-Surface Painting
- Compact Structure, Efficient Management

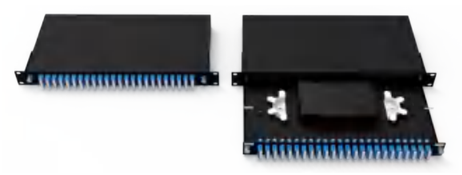

P/N:KD-PB1H1	Size:482.6X240X43.6mm	Height/Max. Cores:1U/96C	Color:Black(RAL9005)
Structure:Sliding Model	Cassettes:1	Accessories:Cable Ties x6, Velcro Straps x6, Shrink Tubes	
Inner Box:535X325X50mm	Q'TY/Box:1PC	CTN Size:550X275X345mm	Q'TY/CTN:5PCS

KD-PB1H2

Sliding Patch Panels

- Standard 19'' Width
- Height:2U, Max.192C
- Sliding Model Design
- Used For Splicing Fiber
- High-Quality Metal-Processing Technology, Matte-Surface Painting
- Compact Structure, Efficient Management



P/N:KD-PB1H2	Size:482.6X240X88mm	Height/Max. Cores:2U/192C	Color:Black(RAL9005)
Structure:Sliding Model	Cassettes:1	Accessories:Cable Ties x6, Velcro Straps x6, Shrink Tubes	
Inner Box:535X315X95mm	Q'TY/Box:1PC	CTN Size:550X305X330mm	Q'TY/CTN:3PCS

KD-PE4H1

Sliding Patch Panels

- Standard 19'' Width
- Height:1U, Max.96C
- Sliding Model Design
- Used For Splicing Fiber
- High-Quality Metal-Processing Technology, Matte-Surface Painting
- Compact Structure, Efficient Management



P/N:KD-PE4H1	Size:482.6X337.5X44mm	Height/Max. Cores:1U/96C	Color:Black(RAL9005)
Structure:Sliding Model	Cassettes:4	Accessories:Cable Ties x6, Velcro Straps x6, Shrink Tubes	
Inner Box:490X370X50mm	Q'TY/Box:1PC	CTN Size:510X290X390mm	Q'TY/CTN:5PCS

KD-PE8H2

Sliding Patch Panels

- Standard 19'' Width
- Height:2U, Max.192C
- Sliding Model Design
- Used For Splicing Fiber
- High-Quality Metal-Processing Technology, Matte-Surface Painting
- Compact Structure, Efficient Management




P/N:KD-PE8H2	Size:482.6X337.5X88mm	Height/Max. Cores:2U/192C	Color:Black(RAL9005)
Structure:Sliding Model	Cassettes:8	Accessories:Cable Ties x6, Velcro Straps x6, Shrink Tubes	
Inner Box:535X405X95mm	Q'TY/Box:1PC	CTN Size:550X420X305mm	Q'TY/CTN:3PCS

KD-RR2C1

Rotating Patch Panels

- Standard 19'' Width
- Height:1U, Max.48C
- Rotating Model
- Used For Splicing Fiber
- High-Quality Metal-Processing Technology, Matte-Surface Painting
- Compact Structure, Efficient Management

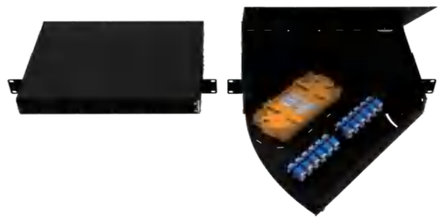

P/N:KD-RR2C1	Size:410X306X44mm	Height/Max. Cores:1U/48C	Color:Black(RAL9005)
Structure:Rotating Model	Cassettes:2	Accessories:Cable Ties x6, Velcro Straps x4, Shrink Tubes	
Inner Box:490X370X50mm	Q'TY/Box:1PC	CTN Size:510X290X390mm	Q'TY/CTN:5PCS

KD-RR2D1

Rotating Patch Panels

- Standard 19'' Width
- Height:1U, Max.48C
- Rotating Model
- Used For Splicing Fiber
- High-Quality Metal-Processing Technology, Matte-Surface Painting
- Compact Structure, Efficient Management




P/N:KD-RR2D1	Size:410X306X44mm	Height/Max. Cores:1U/48C	Color:Black(RAL9005)
Structure:Rotating Model	Cassettes:2	Accessories:Cable Ties x6, Velcro Straps x4, Shrink Tubes	
Inner Box:490X370X50mm	Q'TY/Box:1PC	CTN Size:510X290X390mm	Q'TY/CTN:5PCS

KD-RR1D1

Rotating Patch Panels

- Standard 19'' Width
- Height:1U, Max.96C
- Rotating Model
- Used For Splicing Fiber
- High-Quality Metal-Processing Technology, Matte-Surface Painting
- Compact Structure, Efficient Management

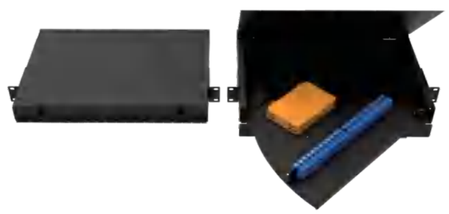

P/N:KD-RR1D1	Size:410X306X44mm	Height/Max. Cores:1U/96C	Color:Black(RAL9005)
Structure:Rotating Model	Cassettes:1	Accessories:Cable Ties x6, Velcro Straps x6, Cabling Ring x2, Shrink Tubes	
Inner Box:490X370X50mm	Q'TY/Box:1PC	CTN Size:510X290X390mm	Q'TY/CTN:5PCS

KD-RR1D2

Rotating Patch Panels

- Standard 19'' Width
- Height:2U, Max.96C
- Rotating Model
- Used For Splicing Fiber
- High-Quality Metad-Processing Technology,Matte-Surface Painting
- Compact Structure, Efficient Munagement



P/N:KD-RR1D2	Size:410X306X88mm	Height/Max. Cores:2U/96C	Color:Black(RAL9005)
Structure:Rotating Model	Cassettes:1	Accessories:Cable Ties x6, Velcro Straps x6, Cabling Ring x2, Shrink Tubes	
Inner Box:565X365X95mm	Q'TY/Box:1PC	CTN Size:580X380X310mm	Q'TY/CTN:3PCS

KD-RR1D3

Rotating Patch Panels

- Standard 19'' Width
- Height:3U, Max.144C
- Rotating Model
- Used For Splicing Fiber
- High-Quality Metal-Processing Technology, Matte-Surface Painting
- Compact Structure, Efficient Management



P/N:KD-RR1D3	Size:410X306X132mm	Height/Max. Cores:3U/144C	Color:Black(RAL9005)
Structure:Rotating Model	Cassettes:1	Accessories:Cable Ties x6, Velcro Straps x6, Cabling Ring x2, Shrink Tubes	
Inner Box:-	Q'TY/Box:-	CTN Size:450X400X145mm	Q'TY/CTN:1PC

KD-RR1D4


Rotating Patch Panels

- Standard 19'' Width
- Height:4U, Max.192C
- Rotating Model
- Used For Splicing Fiber
- High-Quality Metal-Processing Technology, Matte-Surface Painting
- Compact Structure, Efficient Management



P/N:KD-RR1D4	Size:410X306X176mm	Height/Max. Cores:4U/192C	Color:Black(RAL9005)
Structure:Rotating Model	Cassettes:1	Accessories:Cable Ties x6, Velcro Straps x6, Cabling Ring x2, Shrink Tubes	
Inner Box:-	Q'TY/Box:-	CTN Size:450X335X190mm	Q'TY/CTN:1PC

FIBER UNIT BOX

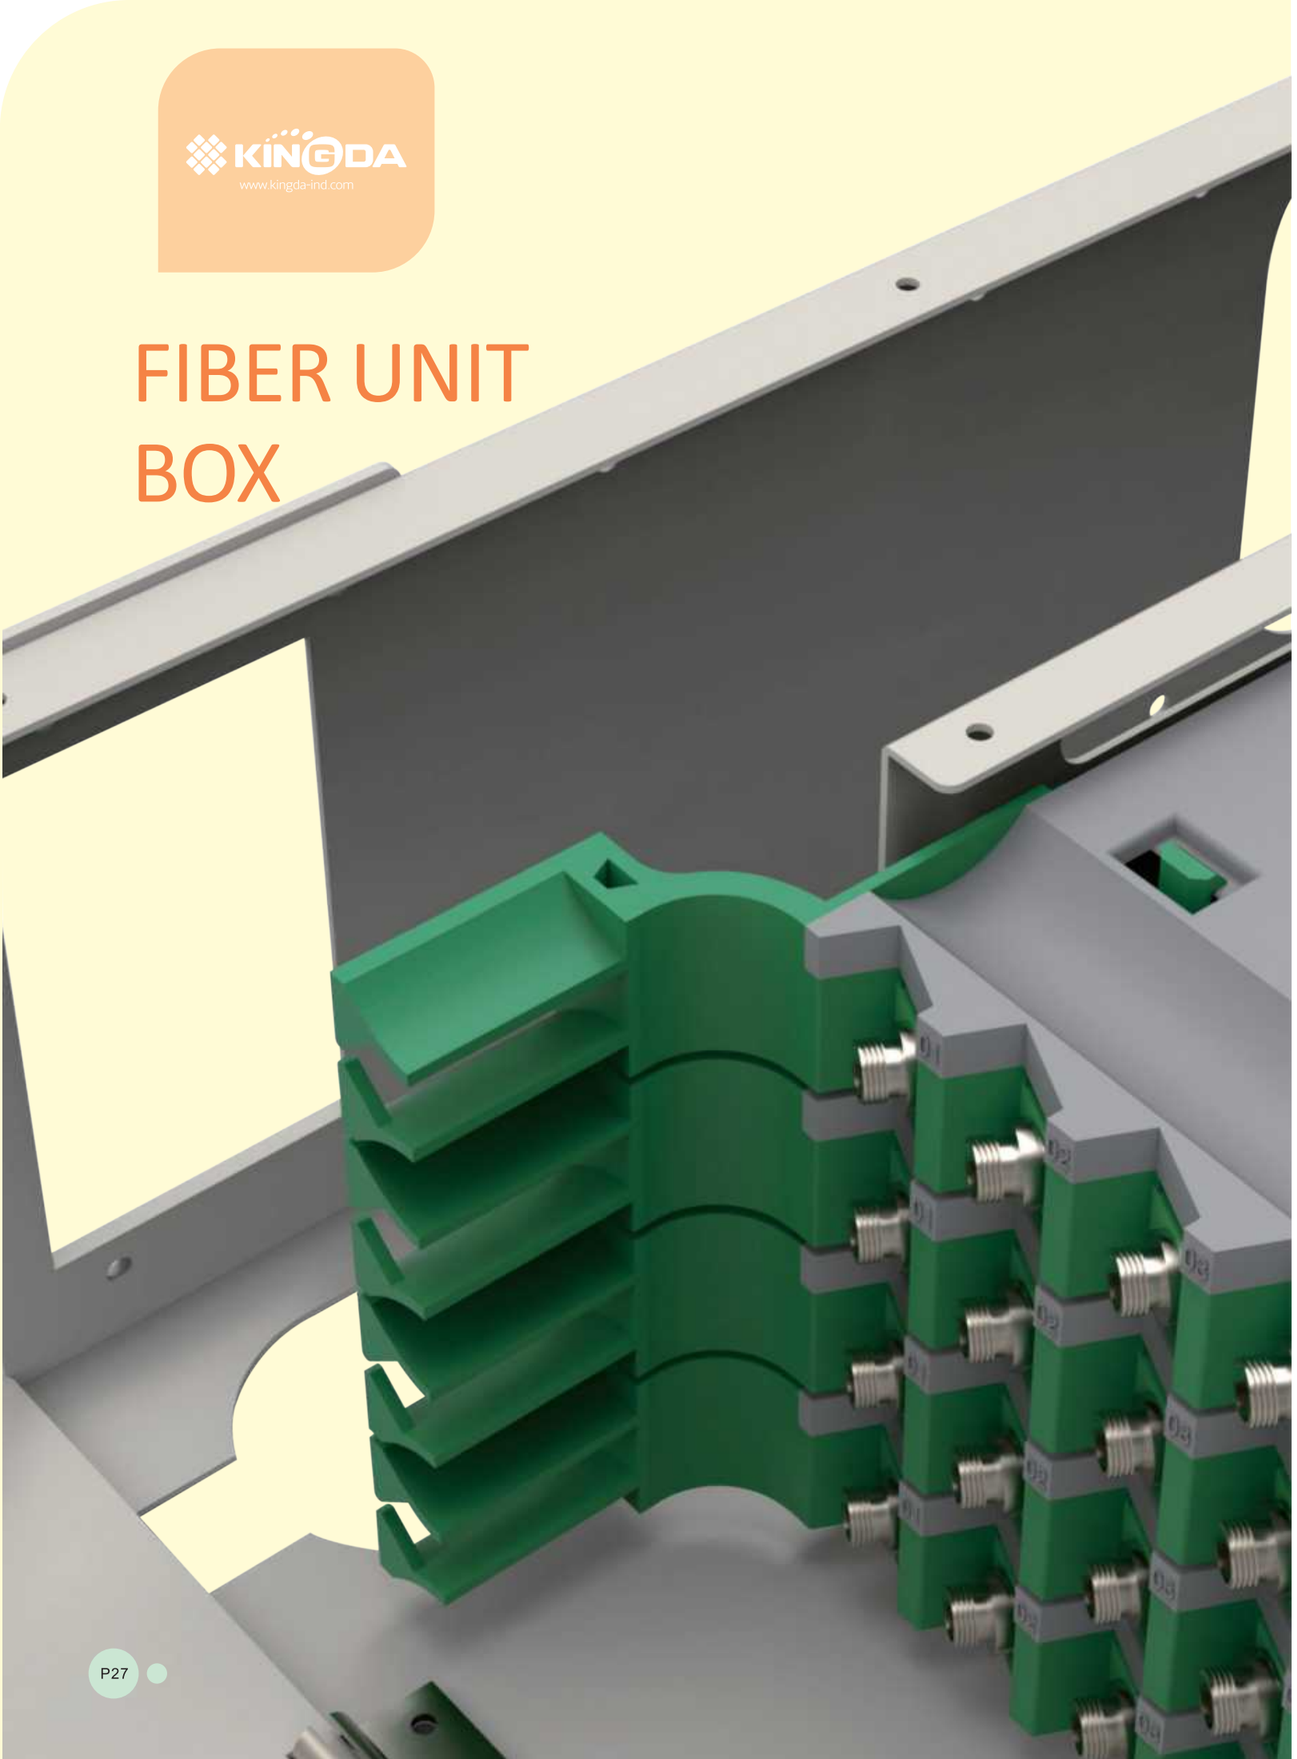

FIBER UNIT BOX

KD-UR1U1

1U Fiber Unit Box

- Standard 19'' Width
- Height:1U, Max.24C
- 12C/24C Splicing Cassette
- Fixed Model
- High-Quality Metal-Processing Technology, Matte-Surface Painting
- Compact Structure, Efficient Management




P/N:KD-UR1U1	Size:410X310X43.5mm	Height/Max. Cores:1U/24C	Color:Beige(RAL1001)
Structure:Fixed Model	Cassettes:1	Accessories:Cable Ties x6, Velcro Straps x6, Cabling Ring x2, Shrink Tubes	
Inner Box:450X330X50mm	Q'TY/Box:1PC	CTN Size:470X290X350mm	Q'TY/CTN:5PCS

KD-UR2U2

2U Fiber Unit Box

- Standard 19'' Width
- Height:2U, Max.48C
- 12C/24C Splicing Cassette
- Fixed Model
- High-Quality Metal-Processing Technology, Matte-Surface Painting
- Compact Structure, Efficient Management

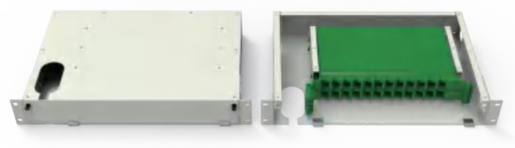

P/N:KD-UR2U2	Size:410X310X69mm	Height/Max. Cores:2U/48C	Color:Beige(RAL1001)
Structure:Fixed Model	Cassettes:2	Accessories:Cable Ties x6, Velcro Straps x6, Cabling Ring x2, Shrink Tubes	
Inner Box:450X340X75mm	Q'TY/Box:1PC	CTN Size:470X350X245mm	Q'TY/CTN:5PCS

KD-UR4U3

3U Fiber Unit Box

- Standard 19'' Width
- Height:3U, Max.72C
- 12C/24C Splicing Cassette
- Fixed Model
- High-Quality Metal-Processing Technology, Matte-Surface Painting
- Compact Structure, Efficient Management




P/N:KD-UR4U3	Size:410X310X125mm	Height/Max. Cores:3U/72C	Color:Beige(RAL1001)
Structure:Fixed Model	Cassettes:4	Accessories:Cable Ties x6, Velcro Straps x6, Cabling Ring x2, Shrink Tubes	
Inner Box:450X330X135mm	Q'TY/Box:1PC	CTN Size:470X350X290mm	Q'TY/CTN:2PCS

KD-UR6U4

4U Fiber Unit Box

- Standard 19'' Width
- Height:4U, Max.144C
- 12C/24C Splicing Cassette
- Fixed Model
- High-Quality Metal-Processing Technology, Matte-Surface Painting
- Compact Structure, Efficient Management




P/N:KD-UR6U4	Size:410X310X175mm	Height/Max. Cores:4U/144C	Color:Beige(RAL1001)
Structure:Fixed Model	Cassettes:6	Accessories:Cable Ties x12, Velcro Straps x6, Cabling Ring x2, Shrink Tubes	
Inner Box:-	Q'TY/Box:-	CTN Size:470X335X190mm	Q'TY/CTN:1PC

KD-UR8U5.5

5.5U Fiber Unit Box

- Standard 19'' Width
- Height:5.5U, Max.192C
- 12C/24C Splicing Cassette
- Fixed Model
- High-Quality Metal-Processing Technology, Matte-Surface Painting
- Compact Structure, Efficient Management

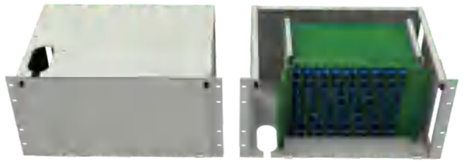


P/N:KD-UR8U5.5	Size:410X310X240mm	Height/Max. Cores:5.5U/192C	Color:Beige(RAL1001)
Structure:Fixed Model	Cassettes:8	Accessories:Cable Ties x16, Velcro Straps x6, Cabling Ring x2, Shrink Tubes	
Inner Box:-	Q'TY/Box:-	CTN Size:450X335X255mm	Q'TY/CTN:1PC

KD-CXF1

Fiber Optic Storage Box


- Standard 19'' Width
- Fixed Model
- High-Quality Metal-Processing Technology, Matte-Surface Painting
- Compact Structure, Efficient Management



P/N:KD-CXF1	Size:482.6X266.7X44mm	Color:Grey(RAL7035)	Structure:Fixed Model
Cassettes:4	Accessories:Cable Ties x6, Velcro Straps x6, Cabling Ring x2, Shrink Tubes		
Inner Box:535X325X50mm	Q'TY/Box:1PC	CTN Size:550X275X345mm	Q'TY/CTN:5PCS

KINGDA
www.kingda-ind.com

MPO/SPLICING CASSETTES

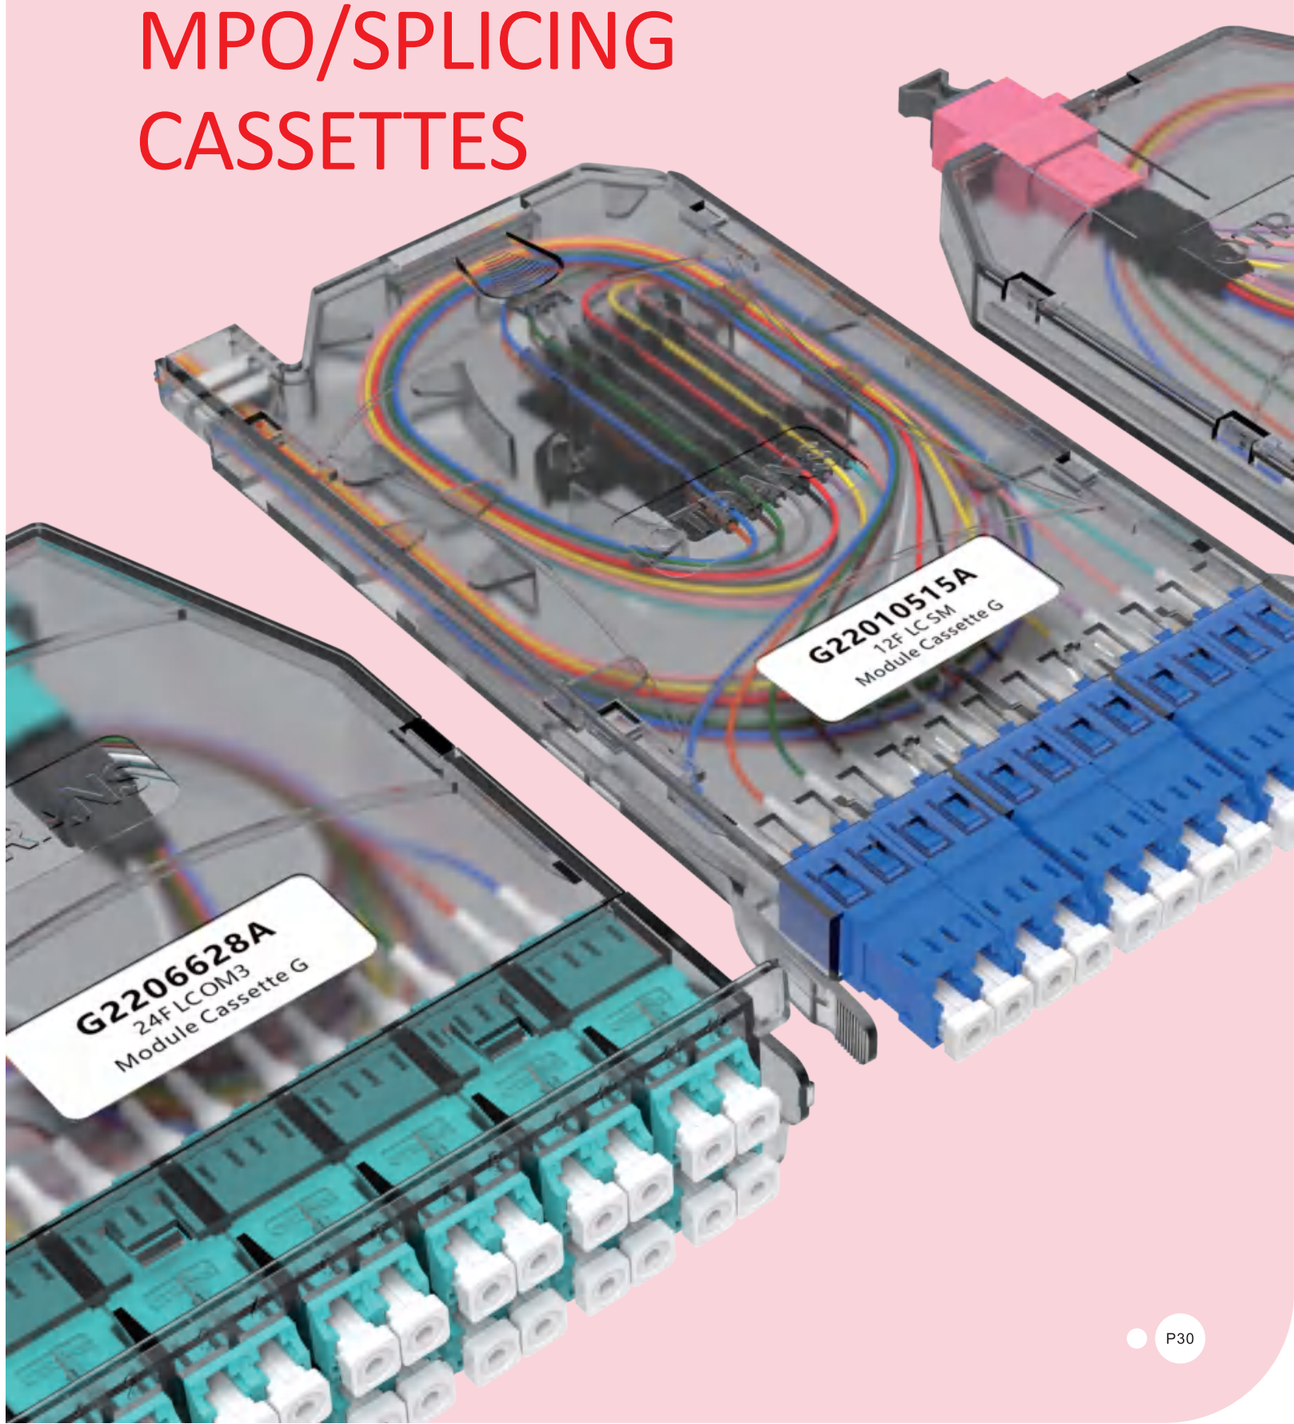

MPO/SPLICING CASSETTES



KD-SP12MC

Apply to Ultra HD Cabling Management
Material:Transparent ABS
Weight:40g
Shrapnel Fixed, Install Easily
Used for MPO Cabling
Logo Custerized




KD-FM24MC

Apply to Ultra HD Cabling Management
Material:Transparent ABS
Weight:70g
Shrapnel Fixed, Install Easily
Used for MPO Cabling
Logo Custerized




KD-SP12SC

Apply to Ultra HD Cabling Management
Material:Transparent ABS
Weight:60g
Shrapnel Fixed, Install Easily
Logo Custerized




KD-SP12SC-M

Apply to Ultra HD Cabling Management
Material:Metal
Shrapnel Fixed, Install Easily



KD-SPMPO6P

Apply to Ultra HD Cabling Management
Material:Metal
Shrapnel Fixed, Install Easily




KD-SP24SC

Apply to Ultra HD Cabling Management
Material:Transparent ABS
Weight:110g
Used for MPO/Shrink Tubes/Splitter
Logo Custerized



KD-FM24AMC

Apply to Ultra HD Cabling Management
Material:Metal
Shrapnel Fixed, Install Easily



KD-CRSC12

Apply to Ultra HD Cabling Management
Material:Metal
Used For Splicing Cassette

KINGDA
www.kingda-ind.com

ADAPTER PANELS



ADAPTER PANELS

130 APAPTER PANELS



KD-130-LGX-DLC12

Used for 12 x LC DX
Material:SPCC
6.4 Locker



KD-130-LGX-DLC3

Used for 3 x LC DX
Material:SPCC
6.4 Locker



KD-130-LGX-4LC6

Used for 6 x LC Quad
Material:SPCC
6.4 Locker



KD-130-LGX-SC6

Used for 6 x SC SX
Material:SPCC
6.4 Locker




KD-130-LGX-FC6

Used for 6 x FC
Material:SPCC
6.4 Locker



KD-130-LGX-ST12

Used for 12 x ST
Material:SPCC
6.4 Locker



KD-130-LGX-SC6DX

Used for 6 x SC DX
Material:SPCC
6.4 Locker



KD-130-LGX-Blank

130 Blank Panel
Material:SPCC
6.4 Locker

175 APAPTER PANELS



KD-175-DSC9

Used for 9 x SC DX
Material:SPCC
8.2 Locker



KD-175-SC12

Used for 12 x SC SX
Material:SPCC
8.2 Locker



KD-175-FC12

Used for 12 x FC
Material:SPCC
8.2 Locker



KD-175-DLC12

Used for 12 x LC DX
Material:SPCC
8.2 Locker

ADAPTER PANELS



KD-175-4LC6

Used for 6 x LC Quad
Material:SPCC
8.2 Locker



KD-175-4LC6V

Used for 6 x LC Quad
Material:SPCC
8.2 Locker



KD-175-FC18

Used for 18 x FC
Material:SPCC
8.2 Locker



KD-175-4LC12

Used for 12 x LC Quad
Material:SPCC
8.2 Locker



KD-175-DSC6

Used for 6 x SC DX
Material:SPCC
8.2 Locker



KD-175P-SC6

Used for 6 x SC SX
Material:SPCC
8.2 Locker



KD-175P-DLC12

Used for 12 x LC DX
Material:SPCC
8.2 Locker



KD-175-4LC3

Used for 3 x LC Quad
Material:SPCC
8.2 Locker



KD-175-Blank

175 Blank Panel
Material:SPCC
8.2 Locker

92 APAPTER PANELS



KD-92-Blank

92 Blank Panel
Material:Plastic



KD-92-MPO6

Used for 6 x MPO
Material:Plastic



KD-92-FC6

Used for 6 x FC
Material:Plastic



KD-92-DLC12

Used for 12 x LC DX
Material:Plastic



KD-92-DLC12A

Used for 12 x LC DX
Material:Plastic

ADAPTER PANELS

109 APAPTER PANELS



KD-109-FC12

Used for 12 x FC
Material:SPCC
6.4 Locker



KD-109-DLC8

Used for 8 x LC DX
Material:SPCC
6.4 Locker



KD-109-MPO6

Used for 6 x MPO
Material:SPCC
6.4 Locker



KD-109-DLC6

Used for 6 x LC DX
Material:SPCC
6.4 Locker



KD-109-DLC4

Used for 4 x LC DX
Material:SPCC
6.4 Locker



KD-109-SC12

Used for 12 x SC SX
Material:SPCC
6.4 Locker



KD-109-ST8

Used for 8 x ST
Material:SPCC
6.4 Locker

165 APAPTER PANELS



KD-165-ST12

Used for 12 x ST
Material:SPCC
6.4 Locker



KD-165-DLC12

Used for 12 x LC DX
Material:SPCC
6.4 Locker



KD-165-DSC12

Used for 12 x SC DX
Material:SPCC
6.4 Locker



KD-165-FC16

Used for 16 x FC
Material:SPCC
6.4 Locker



KD-165-SC6

Used for 6 x SC SX
Material:SPCC
6.4 Locker




KD-165-4LC6

Used for 6 x LC Quad
Material:SPCC
6.4 Locker


FIBER OPTIC TERMINATION BOXES

KINGDA
www.kingda-ind.com

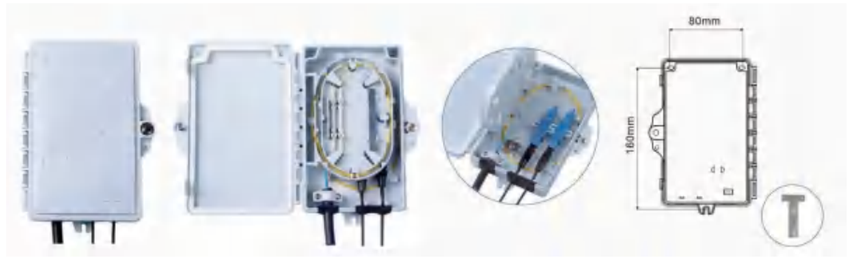


KD-2512-2A
2 Cores

Dimensions: 168*102*32mm	Inlet/Outlet Ports: 1 in 2 out
Max. Inlet Cable Diameter: 10mm	Heat Shrink Capacity: 2
Adaptor Capacity: 2	PLC Installation: Support
Packing: 60pcs/carton,42.5*40*39.5cm,14.73KGS	

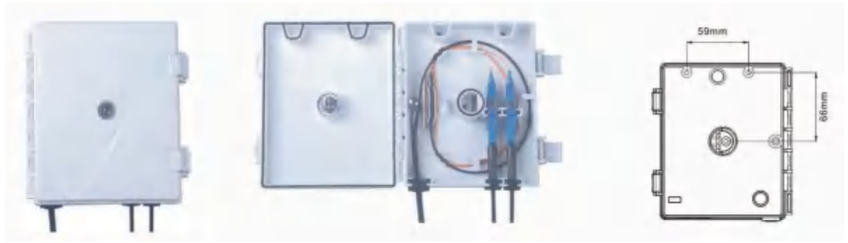

KD-2513-2B
2 Cores

Dimensions: 152*134*36mm	Inlet/Outlet Ports: 1 in 2 out
Max. Inlet Cable Diameter: 7mm	Heat Shrink Capacity: 2
Adaptor Capacity: 2	
Packing: 40pcs/carton,52*33*30cm,8.98KGS	

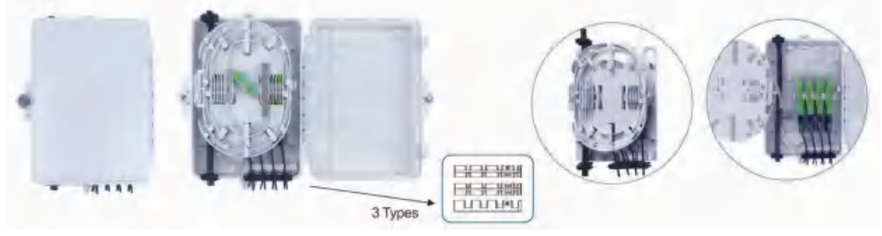


KD-2560-4G/8G
4/8 Cores

Dimensions: 189.5*154*43mm	Inlet/Outlet Ports: 1 in 8 out
Max. Inlet Cable Diameter: 7mm	Heat Shrink Capacity: 8
Adaptor Capacity: 8	
Packing: 40pcs/carton,45.5*33.5*53cm,15.92KGS	

INDOOR FIBER OPTIC TERMINATION BOXES

KD-2514-4A
4 Cores

KD-2514-6J
6 Cores

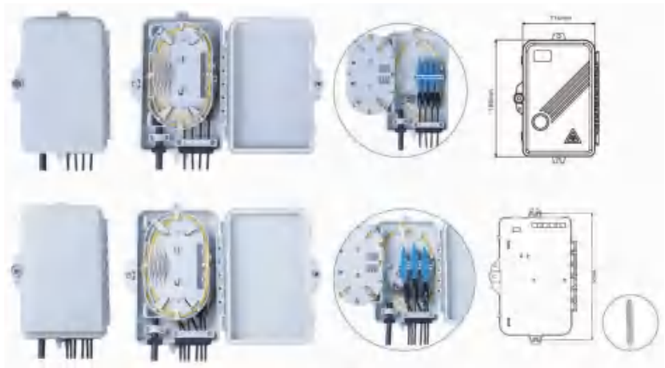


	KD-2514-4A	KD-2514-6J
Dimensions	186*116*41mm	
Inlet/Outlet Ports	1 in 4 out	1 in 6 out
Max. Inlet Cable Diameter	10mm	10mm
Heat Shrink Capacity	4	6
PLC Installation	Support	Support
Adaptor Capacity	4	6
Packing	40pcs/carton,43.5*36.5*40.5cm,14.41KGS	40pcs/carton,43.5*36.5*40.5cm,14.53KGS

KD-2516-8E
8 Cores




KD-2516-8F
8 Cores

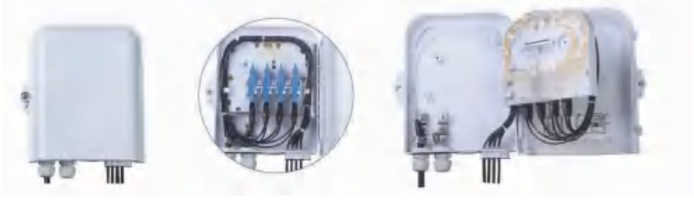

	KD-2516-8E	KD-2516-8F
Dimensions	223*180*48mm	
Inlet/Outlet Ports	3 in 8 out	2 in 8 out
Max. Inlet Cable Diameter	14mm	12mm
Heat Shrink Capacity	8	8
PLC Installation	Support	Support
Adaptor Capacity	8	8
Packing	20pcs/carton,51.5*43.5*39cm,14.31KGS	20pcs/carton,51.5*43.5*39cm,13.54KGS

KD-2511-8R
8 Cores

KD-2511-12R
12 Cores

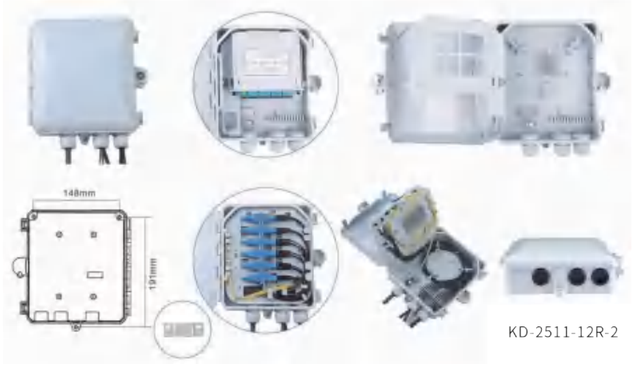


KD-2511-12R-2

	KD-2511-8R	KD-2511-12R	KD-2511-12R-H
Dimensions	210*205*49mm		210*205*59mm
Inlet/Outlet Ports	1 in 2 out		
Inlet Port Type	Gland/Rubber		
Gland Size/Rubber Diameter	PG16/18mm		
Heat Shrink Capacity	8	12	12
PLC Type	Insertion Type	N/A	N/A
Packing	40pcs/carton,47*43.5*62.5cm,22.01KGS		40pcs/carton,48*44.5*73cm,24.56KGS

KD-2511-8P
8 Cores

KD-2511-12C
12 Cores

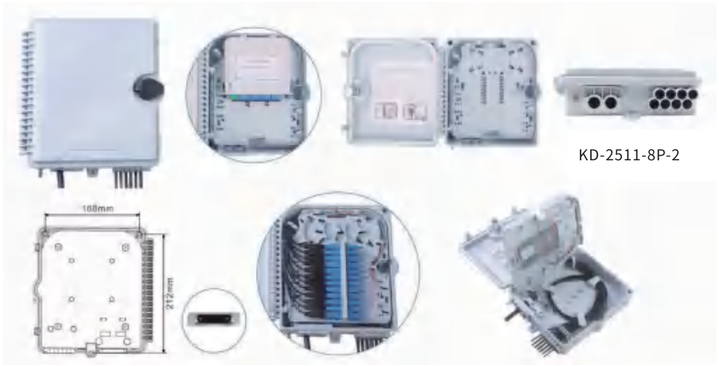

KD-2511-8P-2

	KD-2511-8P	KD-2511-8P-2	KD-2511-12C
Dimensions	233*214*71mm		
Inlet/Outlet Ports	2 in 12 out	2 in 8 out	2 in 12 out
Inlet Port Type	Mid-span access		
Heat Shrink Capacity	8	8	12
PLC Type	Insertion Type	Insertion Type	Mini PLC
Packing	20pcs/carton 49*46*39cm,18.59KGS	20pcs/carton 49*46*39cm,18.59KGS	20pcs/carton 49*46*49cm,18.36KGS

KD-2511-16C
16 Cores


KD-2511-24C
24 Cores



	KD-2511-16C	KD-2511-24C
Dimensions	233*214*71mm	233*214*90mm
Inlet/Outlet Ports	2 in 16 out	4 in 24 out
Inlet Port Type	Mid-span access	
Heat Shrink Capacity	24	72
PLC Type	N/A	Mini PLC
Packing	20pcs/carton,49*47*40cm,17.89KGS	

KD-2519-8B-G/M
8 Cores

KD-2519-12D
12 Cores

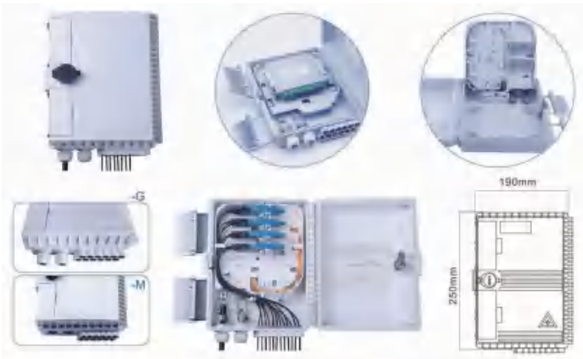

*"-G " for gland type inlet "-M " for m-span access inlet

	KD-2519-8B	KD-2519-12D
Dimensions	250*190*72mm	
Inlet/Outlet Ports	2 in 12 out	
Inlet Port Type	Mid-span access / gland	
Max. Inlet Cable Diameter	11mm	11mm
Heat Shrink Capacity	8	12
PLC Type	Insertion Type	Mini Type

KD-2521-16G
16 Cores

KD-2521-16P
16 Cores



*"-G " for gland type inlet "-M " for m-span access inlet

	KD-2521-16G	KD-2521-16P
Dimensions	292*218*83mm	
Inlet/Outlet Ports	2 in 16 out	
Inlet Port Type	Mid-span / Cable Gland	
Max. Inlet Cable Diameter	Mid-span:14mm	Cable Gland:12mm
Heat Shrink Capacity	16	16
PLC Type	Mini PLC	Insertion Type
Packing	10pcs/carton,51*33.5*58.5cm,15.95KGS	10pcs/carton,51*33.5*58.5cm,14.74KGS

KD-2506-16J-G/M
16 Cores

KD-2506-16P-G/M
16 Cores



*"-G " for gland type inlet "-M " for m-span access inlet

	KD-2506-16J	KD-2506-16P
Dimensions	301*224*73mm	
Inlet/Outlet Ports	2 in 16 out	
Inlet Port Type	Mid-span Access/Gland	
Max. Inlet Cable Diameter	Mid-span:14mm	Cable Gland:12mm
Heat Shrink Capacity	16	16
PLC Type	Mini PLC	Insertion Type
Packing	10pcs/carton,56*33*57cm,15.18KGS	10pcs/carton,56*33*57cm,14.77KGS

INDOOR FIBER OPTIC TERMINATION BOXES

KD-2509-24A
24 Cores



*"-G " for gland type inlet "-M " for m-span access inlet

Dimensions	317*237*101mm
Inlet/Outlet Ports	3 in 24 out
Inlet Port Type	Mid-span Access / Gland
Max. Inlet Cable Diameter	Mid-span:14mm Cable Gland:12mm
No. of Splice	24
PLC Type	Mini PLC
Packing	10pcs/carton,60*35.5*59.5cm,16.65KGS

KD-2510-16C
16 Cores

KD-2510-16D
16 Cores




	KD-2510-16C	KD-2510-16D
Dimensions	317*237*101mm	
Inlet/Outlet Ports	3 in 16 out	
Inlet Port Type	Mid-span Access / Gland	
Max. Inlet Cable Diameter	Mid-span:14mm Cable Gland:12mm	
No. of Splice	16	16
PLC Type	Insert PLC Splitter	Mini PLC
Packing	10pcs/carton,60*35.5*59.5cm,16.43KGS	10pcs/carton,60*35.5*59.5cm,16.43KGS



KD-2522-2H

2 Cores

Size: 130*84*24mm	Capacity: 2 Cores
Adapter Type: SC/LC/FC	Adapter No.: 2
Inlet Cable: 3.0*2.0mm drop cable or indoor cable	
Packing: 200pcs/carton,73.5*35.5*30cm,14.2KGS	

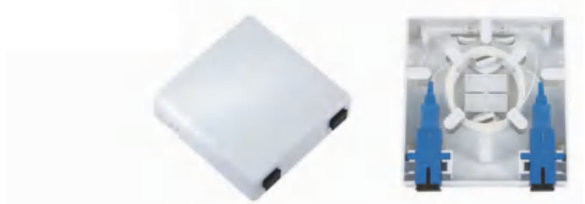

KD-2526

2 Cores

Size: 86*86*21mm	Capacity: 2 Cores
Adapter Type: SC/LC/FC	Adapter No.: 2
Inlet Cable: 3.0*2.0mm drop cable or indoor cable	
Packing: 400pcs/carton,55*37.5*38.5cm,18.36KGS	



KD-2522-2Q

2 Cores

Size: 102*80*25mm	Capacity: 2 Cores
Adapter Type: SC/LC/FC	Adapter No.: 2
Inlet Cable: 3.0*2.0mm drop cable or indoor cable	
Packing: 200pcs/carton,59*35*31cm,15.71KGS	



KD-2522-1W

1 Core

Size: 116*86*23mm	Capacity: 1 Core
Adapter Type: SC/LC/FC	Adapter No.: 1
Inlet Cable: 3.0*2.0mm drop cable or indoor cable	
Packing: 200pcs/carton,49*29*51cm.11.55KGS	



KD-2522-2W

2 Cores

Size: 116*86*23mm	Capacity: 2 Cores
Adapter Type: SC/LC/FC	Adapter No.: 1
Inlet Cable: 3.0*2.0mm drop cable or indoor cable	
Packing: 200pcs/carton,49*29*51cm,11.55KG	



KD-2522-2M

2 Cores

Size: 124*79*26mm	Capacity: 2 Cores
Adapter Type: SC/LC/FC	Adapter No.: 1
Inlet Cable: 3.0*2.0mm drop cable or indoor cable	
Packing: 200pcs/carton,73.5*35.5*30cm,14.2KGS	



KD-2526-4

4 Cores

Size: 150*110*34mm	Capacity: 4 Cores
Adapter Type: SC/LC/FC	Adapter No.: 4
Inlet Cable: 3.0*2.0mm drop cable or indoor cable	
Packing: 100pcs/carton,61.5*32.5*41cm,15.54KGS	



KD-2526-4T

4 Cores


Size: 100*85*29mm	Capacity: 4 Cores
Adapter Type: SC/LC/FC	Adapter No.: 4
Inlet Cable: 3.0*2.0mm drop cable or indoor cable	
Packing: 200pcs/carton,54.5*33*45.5cm,16.43KGS	



KD-2550

8 Cores

Size: 226*134*51mm	Capacity: 8 Cores
Adapter Type: SC/LC/FC	Adapter No: 8
Inlet/Outlet Ports: 2 in 8 out	
Heat Shrink Capacity: 12*2	
No. of Splice Tray: 2	PLC Type: Mini PLC
Max. Inlet Cable Diameter: 12mm	
Packing: 20pcs/carton,45.5*34.5*39cm,9.375KGS	

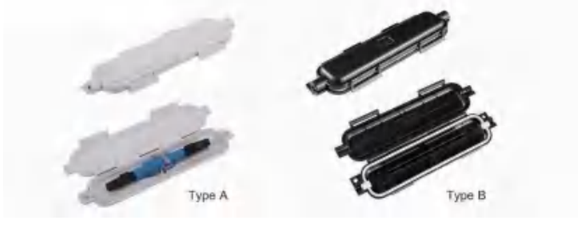

KD-2551

1 Core

Size: 160*45*17mm	Capacity: 1 Core
Adapter Type: SC/LC/FC	Adapter No.: 1
Inlet Cable: 3.0*2.0mm drop cable or indoor cable	
Packing: 500pcs/carton,54.5*31.5*45.5cm,19.16KGS	



KD-2522-1R

1 Core

Size: 116*86*23mm	Capacity: 1 Core
Adapter Type: SC/LC/FC	Adapter No.: 1
Inlet Cable: 3.0*2.0mm drop cable or indoor cable	
Packing: 200pcs/carton,49*29*51cm,16.10KGS	



KD-2522-2R

2 Cores

Size: 116*86*23mm	Capacity: 2 Cores
Adapter Type: SC/LC/FC	Adapter No.: 1
Inlet Cable: 3.0*2.0mm drop cable or indoor cable	
Packing: 200pcs/carton,49*29*51cm,16.10KGS	



KD-2522-3R

3 Cores

Size: 116*86*23mm	Capacity: 3 Cores
Adapter Type: SC/LC/FC	Adapter No.: 3
Inlet Cable: 3.0*2.0mm drop cable or indoor cable	
Packing: 200pcs/carton,49*29*51cm,16.10KGS	



KD-2522-4R

4 Cores

Size: 116*86*23mm	Capacity: 4 Cores
Adapter Type: SC/LC/FC	Adapter No.: 4
Inlet Cable: 3.0*2.0mm drop cable or indoor cable	
Packing: 200pcs/carton,49*29*51cm,16.10KGS	



KD-2522-5R

5 Cores

Size: 116*86*23mm	Capacity: 5 Cores
Adapter Type: SC/LC/FC	Adapter No.: 5
Inlet Cable: 3.0*2.0mm drop cable or indoor cable	
Packing: 200pcs/carton,49*29*51cm,16.10KGS	



KD-2522-6R

6 Cores

Size: 116*86*23mm	Capacity: 6 Cores
Adapter Type: SC/LC/FC	Adapter No.: 6
Inlet Cable: 3.0*2.0mm drop cable or indoor cable	
Packing: 200pcs/carton,49*29*51cm,16.10KGS	



KD-2522-4F

4 Cores

Size: 80*80*31mm	Capacity: 4 Cores
Adapter Type: SC/LC/FC	Adapter No.: 4
Inlet Cable: 3.0*2.0mm drop cable or indoor cable	
Packing: 200pcs/carton,35*32.5*46cm,14.01KGS	



KD-2526-1C

1 Core

Size: 93*83*29mm	Capacity: 1 Core
Adapter Type: SC/LC/FC	Adapter No.: 1
Inlet Cable: 3.0*2.0mm drop cable or indoor cable	
Packing: 200pcs/carton,49.5*31*41cm,14.72KGS	



KD-2527

1 Core

Size: 86*86*22mm	Capacity: 1 Core
Adapter Type: SC/LC/FC	Adapter No.: 1
Inlet Cable: 3.0*2.0mm drop cable or indoor cable	
Packing: 400pcs/carton,55*37.5*38.5cm,18.36KGS	



KD-2552

1 Core

Size: 148.5*90*16m	Capacity: 1 Core
Adapter Type: SC/LC/FC	Adapter No.: 1
Inlet Cable: 3.0*2.0mm drop cable or indoor cable	
Packing: 200pcs/carton,38.5*34*54cm,16.86KGS	

KD-2548
48 Cores



Dimensions	480*380*135mm
Inlet/Outlet Ports	3 in 10 out
Inlet Port Type	Gland/Rubber
Gland Size/Rubber Diameter	PG19/15mm
Max. Inlet Cable Diameter	ϕ15mm
Heat Shrink Capacity	48
PLC Type	Cassette Type PLC
Packing	2pcs/carton,52*42*35cm,18.56KGS

KD-2585-8S/16S
8/16 Cores



Dimensions: 343*303*98mm	Inlet/Outlet Ports: 3 in 16 out
Adapter No: 16	PLC Type: Mini PLC
Special Feature: 2 Door	
Packing: 6pcs/carton,62.5*37.5*34cm.16KGS	

KD-2586-36/48I
36/48 Cores



Dimensions	298*340*128mm
Heat Shrink Capacity	36/48
PLC Type	Mini Type
No. of Splice Tray	3/4

KD-2590-12C
12 Cores


KD-2590-24C
24 Cores



	KD-2590-12C	KD-2590-24C
Dimensions	348*272*83mm	348*272*107mm
Inlet/Outlet Ports	4 in 12 out	4 in 24 out
Inlet Port Type	Mid-span Access	Mid-span Access
Heat Shrink Capacity	24	72
Adapter Qty	12	24

KD-2543-32K
32 Cores

KD-2541-48K
48 Cores

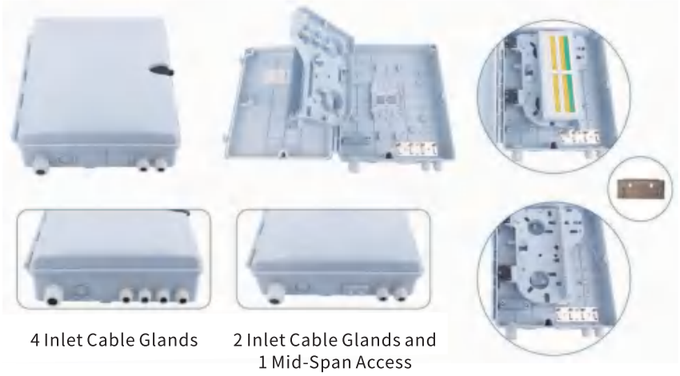

4 Inlet Cable Glands


2 Inlet Cable Glands and 1 Mid-Span Access

	KD-2543-32K	KD-2543-48K
Dimensions	380*320*115mm	380*320*115mm
Inlet/Outlet Ports	4 in 2 out	4 in 2 out
Max. Inlet/Outlet Diameter	15/28mm	15/28mm
Adaptor Capacity	32	48
No. of Splice Tray	2	2
No. of Splice	32	48
Packing	6pcs/carton,70*43*40.5cm,18.35KG	6pcs/carton,70*43*41cm,18KG

INDOOR FIBER OPTIC TERMINATION BOXES

KD-2574

60/64/72/96 Cores

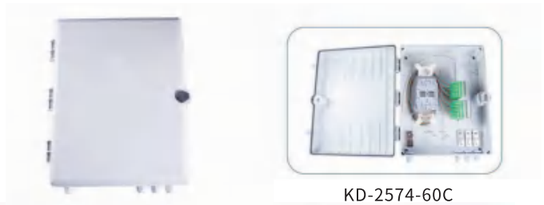

KD-2574-60C



KD-2574-64C　KD-2574-72C　KD-2574-72C/KD-2574-96C

	KD-2574-60C	KD-2574-64C	KD-2574-72C/KD-2574-96C
Dimensions	485*415*145mm		
Max. Inlet/Outlet Diameter	30mm	30mm	30mm
Adaptor Capacity	60	64	72/96
No. of Splice Tray	3	3	3
No. of Splice	60	64	72/96
Packing	6pcs/carton,86*53.5*47.5cm,27.8KGS	3pcs/carton,53*43*47.5cm,14.2KGS	

OUTDOOR FIBER OPTIC ENCLOSURES

KD-2562-8H

8 Cores



KD-2562-8H-A　KD-2562-8H-B



Dimensions	A:304*208*103mm/B:340*208*103mm
Inlet/Outlet Ports	4 in 8 out
Inlet Port Type	Mid-span Access / Gland
Heat Shrink Capacity	96
PLC Type	Mini PLC
Packing	10pcs/carton,36*45.5*61cm,12.02KGS

KD-2562-16H

16 Cores



KD-2562-16H-A　KD-2562-16H-B




Dimensions	A:321*218*137mm/B:350*218*137mm
Inlet/Outlet Ports	4 in 16 out
Inlet Port Type	Mid-span Access / Gland
Heat Shrink Capacity	96
PLC Type	Mini PLC
Packing	10pcs/carton,48*38*76cm,16.26KGS

KD-2563
PLC Splitter Box



Dimensions	216*172*84mm
Ports	11
Heat Shrink Capacity	11
PLC Type	Mini PLC
Connector Type	Outdoor PLC
Packing	20pcs/carton,46.5*39.5*51.5cm,17KGS

KD-2570-16K
16 Cores

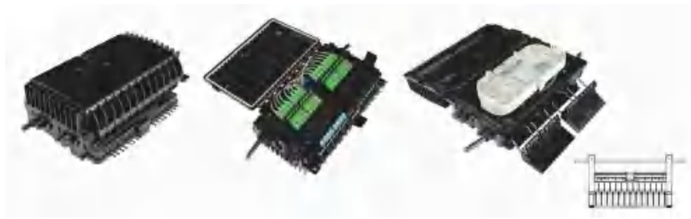

Dimensions	262*173*110mm
Inlet/Outlet Ports	8 in 16 out
Heat Shrink Capacity	48
No. of Splice Tray	2
PLC Type	Mini PLC
Packing	10pcs/carton,36*32*64cm,15.35KGS



KD-2561-16P
16 Cores



KD-2561-16I
16 Cores

Type1 Type2




KD-2561-16F
16 Cores



KD-2561-16F-2
16 Cores



KD-2561-8Q
8 Cores

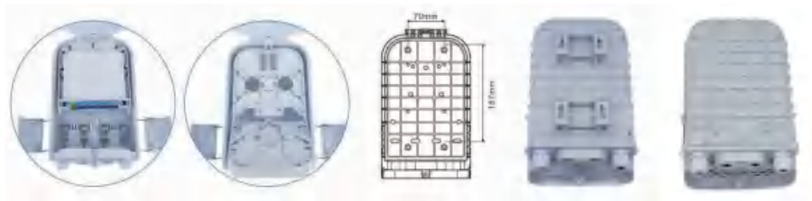




Dia 6mm Dia 4mm Dia 3mm 2x3mm

Multipe Choices of Cable Outlet



	KD-2561-16P	KD-2561-16I	KD-2561-16F	KD-2561-16F-2	KD-2561-8Q
Dimensions	287*172*102mm				
Inlet/Outlet Ports	4 in 16 out				
Inlet Connector Type	Mid-span Access+Cable Gland				
Max. Inlet Cable Diameter	Mid-span:16mm Cable Gland:12mm				
Heat Shrink Capacity	16	16	16	16	8
PLC Type	Insert PLC Splitter	Mini PLC	Mini PLC	Mini PLC	Insert PLC Splitter
No. of Splice Tray	/	/	4	4	/
Packing	10pcs/carton 39.5*30.5*58.5cm 12.61KGS	10pcs/carton 39.5*30.5*58.5cm 12.5KGS	10pcs/carton 39.5*30.5*58.5cm 12.4KGS	10pcs/carton 39.5*30.5*58.5cm 12.45KGS	10pcs/carton 39.5*30.5*58.5cm 12.5KGS


KD-2561-8H
8 Cores

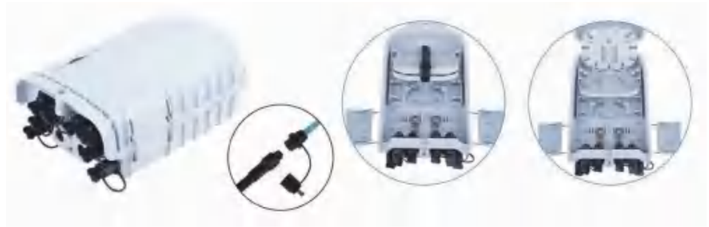

KD-2561-8M
8 Cores



KD-2561-8T
8 Cores

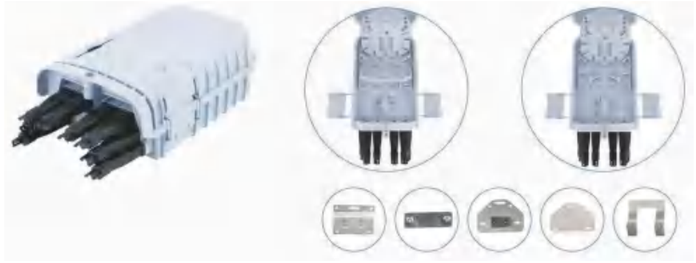


	KD-2561-8H	KD-2561-8M	KD-2561-8T
Dimensions	287*172*102mm		
Inlet/Outlet Ports		2 in 8 out	
Max. Inlet Cable Diameter	16	16	16
Heat Shrink Capacity	8	8	8
PLC Installation	Support		
Packing	10pcs/carton,39.5*30.5*58.5cm,12.5KGS		

KD-2565-16T
16 Cores




KD-2565-16H
16 Cores

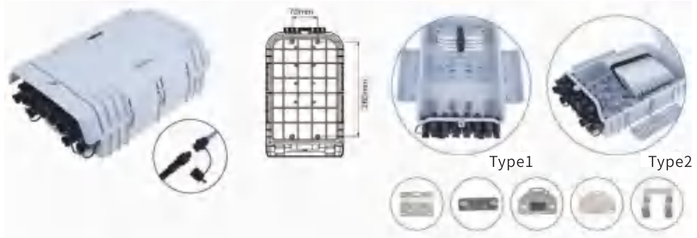

	KD-2565-16T	KD-2565-16H
Dimensions	353*212*106mm	353*212*106mm
Inlet/Outlet Ports	4 in 16 out	4 in 16 out
Max. Inlet Cable Diameter	Mid-span:16mm Cable Gland:12mm	Mid-span:16mm Cable Gland:12mm
Heat Shrink Capacity	16	16
PLC Installation	Support	Support
Packing	10pcs/carton,48*38*66cm,17.58KGS	10pcs/carton,48*38*66cm,17.58KGS

KD-2566-24F
24 Cores

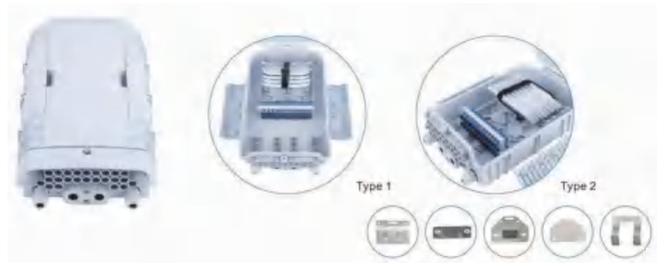

	Type 1	Type2
Dimensions	353*212*106mm	353*212*106mm
Inlet/Outlet Ports	4 in 24 out	4 in 24 out
Inlet Port Type	Mid-span+Cable Gland	Mid-span+Cable Gland
Max. Inlet Cable Diameter	Mid-span:16mm Cable Gland:12mm	Mid-span:16mm Cable Gland:12mm
Heat Shrink Capacity	24	24
No. of Splice Tray	Mini PLC	Mini PLC
Packing	10pcs/carton,48*38*66cm,17.58KGS	10pcs/carton,48*38*66cm,17.58KGS

KD-2570-16L

Multicores



KD-2571-24L　KD-2572-24L-4　KD-2572-24L-6　KD-2573-288C

	KD-2570-16L	KD-2571-24L	KD-2572-24L-4	KD-2572-24L-6	KD-2573-288C
Dimensions	385*240*130mm	385*240*130mm	385*240*155mm	385*240*155mm	385*240*130mm
Inlet/Outlet Ports	4 in 16 out	2 in 24 out	4 in 24 out	4 in 24 out	4 in 4 out
No. of Splice	12*4	12*4	12*4	12*6	12*12
No. of Splice Tray	4	4	4	6	12
Packing	4pcs/carton 52*42.5*33.5cm 17.4KGS	4pcs/carton 52*42.5*33.5cm 17.4KGS	4pcs/carton 52*42*38cm 18.85KGS	4pcs/carton 51*43*37.5cm 19KGS	4pcs/carton 51*42*33cm 19.405KGS


KD-2580

Multicores



KD-2580-8H　KD-2580-8M　KD-2580-16T　KD-2580-36G


	KD-2580-8H	KD-2580-8M	KD-2580-16T	KD-2580-36G
Dimensions	270*272*102mm			
Inlet/Outlet Port	4 in 8 out	4 in 8 out	2 in 16 out	4 in 36 out
Max. Inlet Cable Diameter	15mm	15mm	13mm	15mm
Max. No. of Splice Tray	4/8			
Heat Shrink Capacity	48/96			

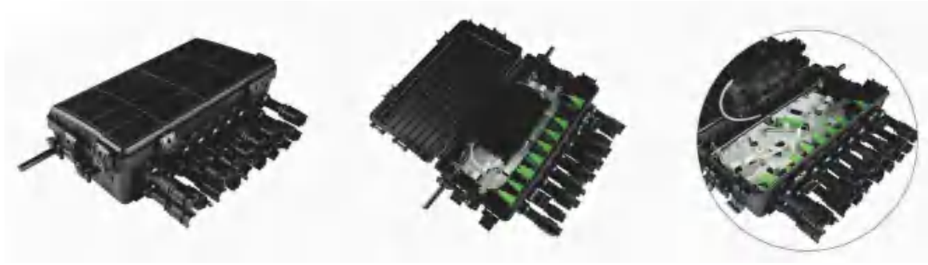

KD-25070

16 Cores

Dimensions	359*278*104mm
Inlet/Outlet Ports	2 in 16 out
PLC Type	Min PLC
Splice Tray Qty	2

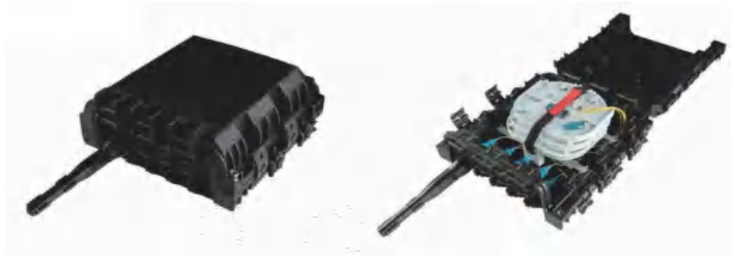

KD-25070-2

8 Cores

Dimensions	323*233*125mm
Inlet/Outlet Ports	4 in 8 out
PLC Type	Mini PLC
Splice Tray Qty	3




KD-25049-8W


8 Cores

Dimensions: 305*190*60m	Inlet/Outlet Ports: 4 in 8 out
Max. Inlet/Outlet Diameter: 15mm	PLC Type: Insert PLC/Mini PLC
Heat Shrink Capacity: 12	No. of Splice Tray: 1

KD-25071
KD-25072
KD-25073
48/96 cores

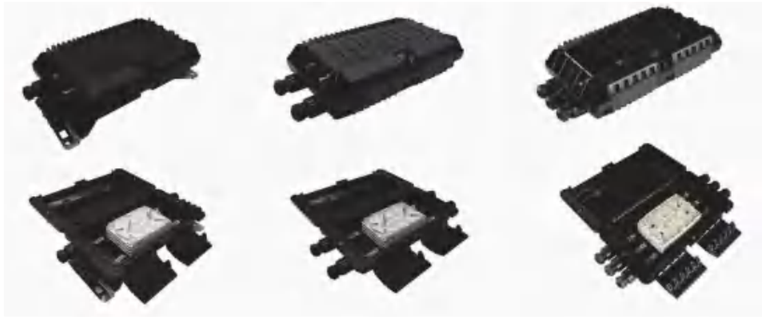

	KD-25071	KD-25072	KD-25073
Dimensions		500*230*110mm	
Inlet/Outlet Ports	1 in 8 out	2 in 2 out	3 in 3 out
Max. Capacity	96	96	96
No. of Splice Tray	12*4/12*8	12*4/12*8	12*4/12*8
No. of Splice	4/8	4/8	4/8
Material	PP+GF/PC	PP+GF/PC	PP+GF/PC
Packing	10pcs/carton,62*51*48cm,29KGS	10pcs/carton,62*51*48cm,29KGS	10pcs/carton,62*51*48cm,29KGS

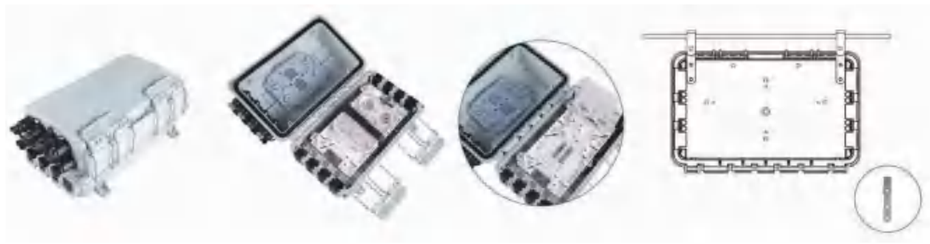

KD-25080
16 Cores

Dimensions: 317*237*101mm	Inlet/Outlet Ports: 8 in 16 out
Inlet Port Type: Mid-span Access / Gland	No. of Splice: 96
Max. Inlet Cable Diameter: Mid-span:14mm	Cable Gland:12mm
PLC Type: Mini PLC	No. of Splice: 24
Packing: 10pcs/carton,40*36*66cm,18.56KGS	


KD-25075
KD-25076
16/96 Cores



KD-25077
16/96 Cores



KD-25078
8/16 Cores

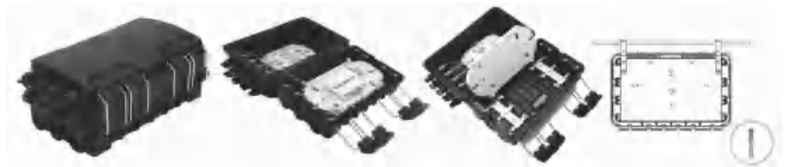

KD-25074
8/16/96/144 Cores



	KD-25075	KD-25076	KD-25077	KD-25078
Dimensions	290*185*117mm		290*185*91mm	290*185*119mm
Inlet/Outlet Port	6 in 16 out	6 in 16 out	3 in 3 out	6 in 16 out
PLC Type	Insertion Type	Mini Type	N/A	Mini PLC
Splicy Tray Qty	1	1	4	2
Packing	10pcs/carton 40*31*64cm 18.57KGS		10pcs/carton 40*31*58.5cm 14.68KGS	10pcs/carton 40*36*66cm 18.56KGS

	KD-25074-1	KD-25074-2	KD-25074-3	KD-25074-4
Dimensions	290*185*91mm			290*185*119mm
Inlet/Outlet Port	6 in 16 out	6 in 16 out	6 in 6 out	6 in 16 out
PLC Type	Insertion Type	Mini Type	N/A	Mini PLC
Splicy Tray Qty	1	1	6	2
Packing	10pcs/carton 41*35*53.5cm 15.12KGS			10pcs/carton 41*35*68.5cm 18.56KGS



KD-25052

24 Cores

Dimensions	330(H)*90(ϕ)mm
Inlet/Outlet Ports	1 in 2 out
Max. Capacity	24
No. of Splice Tray	2
No. of Splice	12*2
Material	PP+GF
Packing	10pcs/carton,82*35*28cm,9.73KGS

KD-25052-3

24 Cores

Dimensions	330(H)*110(ϕ)mm
Inlet/Outlet Ports	1 in 3 out
Max. Capacity	24
No. of Splice Tray	2
No. of Splice	12*2
Material	PP/GF
Packing	15pcs/carton,84.5*36.5*45cm,17.37KGS

KD-25021

48 Cores

Dimensions	370(H)*120(ϕ)mm
Inlet/Outlet Ports	2 in 2 out
Max. Capacity	48
No. of Splice Tray	4
No. of Splice	12*4
Material	PC
Packing	8pcs/carton,82*40*39cm,18.12KGS

KD-25022

72 Cores

Dimensions	400(H)*140(ϕ)mm
Inlet/Outlet Ports	2 in 2 out
Max. Capacity	72
No. of Splice Tray	6
No. of Splice	12*6
Material	PC
Packing	8pcs/carton,81*45.5*43cm,21.63KGS

OUTDOOR FIBER OPTIC ENCLOSURES



KD-25024

48 Cores

Dimensions	300(H)*120(ϕ)mm
Inlet/Outlet Ports	1 in 3 out
Cable Diameter	ϕ7mm-ϕ15mm
Max. Capacity	48
No. of Splice Tray	4
No. of Splice	12*4
Material	PP+GF
Packing	8pcs/carton,63.5*42*39cm,15.06KGS

KD-25024-2

48 Cores

Dimensions	300(H)*120(ϕ)mm
Inlet/Outlet Ports	2 in 2 out
Cable Diameter	ϕ7mm-ϕ15mm
Max. Capacity	48
No. of Splice Tray	4
No. of Splice	12*4
Material	PP+GF
Packing	8pcs/carton,63.5*42*39cm,15.24KGS

KD-25025

72 Cores

Dimensions	400(H)*140(ϕ)mm
Inlet/Outlet Ports	1 in 4 out
Max. Capacity	96
No. of Splice Tray	4
No. of Splice	24*4
Material	PP+GF
Packing	8pcs/carton,81*45.5*43cm,23.36KGS

KD-25025-2

72 Cores

Dimensions	400(H)*135(ϕ)mm
Inlet/Outlet Ports	2 in 4 out
Cable Diameter	ϕ7mm-ϕ15mm
Max. Capacity	72
No. of Splice Tray	6
No. of Splice	12*6
Material	PP+GF
Packing	8pcs/carton,81*45.5*43cm,20.61KGS



KD-25023

96 Cores

Dimensions	530(H)*150(ϕ)mm
Inlet/Outlet Ports	1 in 4 out
Max. Capacity	96
No. of Splice Tray	4
No. of Splice	24*4
Material	PP+GF
Packing	6pcs/carton,64.5*48*58.5cm,19.53KGS

KD-25023-2

96 Cores

Dimensions	530(H)*150(ϕ)mm
Inlet/Outlet Ports	1 in 4 out
Max. Capacity	96
No. of Splice Tray	4
No. of Splice	24*4
Material	PP+GF
Packing	6pcs/carton,64.5*48*58.5cm,19.53KGS

KD-25023-3

144 Cores

Dimensions	530(H)*150(ϕ)mm
Inlet/Outlet Ports	1 in 4 out
Max. Capacity	144
No. of Splice Tray	6
No. of Splice	24*6
Material	PP+GF
Packing	6pcs/carton,64.5*48*58.5cm,20.7KGS

KD-25023-4

144 Cores

Dimensions	530(H)*150(ϕ)mm
Inlet/Outlet Ports	2 in 4 out
Max. Capacity	144
No. of Splice Tray	6
No. of Splice	24*6
Material	PP+GF
Packing	6pcs/carton,64.5*48*58.5cm,20.7KGS

OUTDOOR FIBER OPTIC ENCLOSURES



KD-25052-4

96 Cores

Dimensions	337.4(H)*166(ϕ)mm
Inlet/Outlet Ports	1 in 4 out
Cable Diameter	ϕ15mm-ϕ20mm
Max. Capacity	96
No. of Splice Tray	4
No. of Splice	24*4
Material	PP+GF
Packing	15pcs/carton,85*36*46cm,17.3KGS

KD-25052-5

96 Cores

Dimensions	325.9(H)*166(ϕ)mm
Inlet/Outlet Ports	2 in 4 out
Cable Diameter	ϕ11mm-ϕ20mm
Max. Capacity	96
No. of Splice Tray	4
No. of Splice	24*4
Material	PP+GF
Packing	15pcs/carton,85*36*46cm,17.3KGS

KD-25064

96 Cores

Dimensions	520(H)*220(ϕ)mm
Inlet/Outlet Ports	1 in 4 out
Max. Capacity	96
No. of Splice Tray	4
No. of Splice	24*4
Material	PP+GF
Packing	6pcs/carton,72*52*45cm,17.5KGS

KD-25064-2

96 Cores

Dimensions	520(H)*220(ϕ)mm
Inlet/Outlet Ports	2 in 4 out
Max. Capacity	96
No. of Splice Tray	4
No. of Splice	24*4
Material	PP+GF
Packing	6pcs/carton,72*52*45cm,17.5KGS



KD-25055

144 Cores

Dimensions	470(H)*165(ϕ)mm
Inlet/Outlet Ports	1 in 4 out
Max. Capacity	144
No. of Splice Tray	6
No. of Splice	24*6
Material	PP+GF
Packing	4pcs/carton,52.5*52.5*46cm,17.3KGS



KD-25029

144 Cores

Dimensions	470(H)*140(ϕ)mm
Inlet/Outlet Ports	1 in 4 out
Cable Diameter	ϕ7mm-ϕ24mm
Max. Capacity	144
No. of Splice Tray	6
No. of Splice	24*6
Material	PP+GF
Packing	6pcs/carton,60.5*47.5*49.5cm,17.77KGS



KD-25030

144 Cores

Dimensions	470(H)*140(ϕ)mm
Inlet/Outlet Ports	2 in 4 out
Max. Capacity	144
No. of Splice Tray	6
No. of Splice	24*6
Material	PP+GF
Packing	6pcs/carton,60*50*51cm,21KGS




KD-25030-2

144 Cores

Dimensions	470(H)*140(ϕ)mm
Inlet/Outlet Ports	1 in 4 out
Max. Capacity	144
No. of Splice Tray	6
No. of Splice	24*6
Material	PP+GF
Packing	6pcs/carton,60*50*51cm,21KGS

OUTDOOR FIBER OPTIC ENCLOSURES

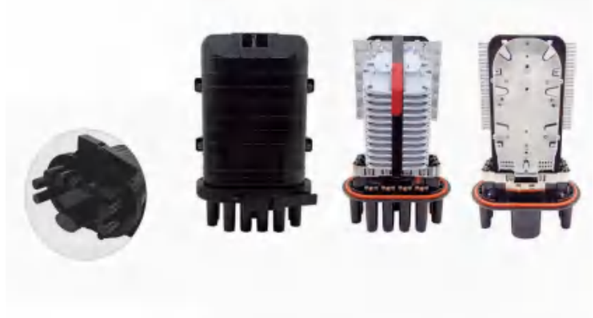

KD-25068

144 Cores

Dimensions	390*280*190mm
Inlet/Outlet Ports	2 in 8 out
Max. Capacity	144
No. of Splice Tray	12
No. of Splice	12*12
Material	PP+GF
Packing	6pcs/carton,72*57*40cm,23.5KGS



KD-25068-2

144 Cores

Dimensions	390*280*190mm
Inlet/Outlet Ports	2 in 8 out
Max. Capacity	144
No. of Splice Tray	12
No. of Splice	12*12
Material	PP+GF
Packing	6pcs/carton,72*57*40cm,23.5KGS



KD-25063

192 Cores

Dimensions	520(H)*220(Φ)mm
Inlet/Outlet Ports	1 in 6 out
Max. Capacity	192
No. of Splice Tray	4
No. of Splice	48*4
Material	PP+GF
Packing	6pcs/carton,72*52*45cm,17.5KGS



KD-25063-2

192 Cores

Dimensions	510(H)*220(ϕ)mm
Inlet/Outlet Ports	2 in 4 out
Max. Capacity	192
No. of Splice Tray	4
No. of Splice	48*4
Material	PP+GF
Packing	6pcs/carton,72*52*45cm,17.5KGS



KD-25060

288 Cores

Dimensions	440(H)*225(ϕ)mm
Inlet/Outlet Ports	1 in 8 out
Cable Diameter	ϕ12mm-ϕ25mm
Max. Capacity	288
No. of Splice Tray	8
No. of Splice	36*8
Material	PP+GF
Packing	6pcs/carton,48*46*63.5cm,15.88KGS



KD-25060-2

288 Cores

Dimensions	448(H)*225(ϕ)mm
Inlet/Outlet Ports	2 in 4 out
Cable Diameter	ϕ18mm-ϕ20mm
Max. Capacity	288
No. of Splice Tray	8
No. of Splice	36*8
Material	PP+GF
Packing	6pcs/carton,48*46*63.5cm,15.88KGS



KD-25062

288 Cores

Dimensions	500(H)*300(ϕ)mm
Inlet/Outlet Ports	1 in 6 out
Max. Capacity	288
No. of Splice Tray	12
No. of Splice	24*12
Material	PP+GF
Packing	4pcs/carton,67*64*53cm,21KGS



KD-25062-2

288 Cores

Dimensions	500(H)*300(ϕ)mm
Inlet/Outlet Ports	2 in 6 out
Max. Capacity	288
No. of Splice Tray	12
No. of Splice	24*12
Material	PP+GF
Packing	4pcs/carton,67*64*53cm,22KGS

OUTDOOR FIBER OPTIC ENCLOSURES



KD-25056

288 Cores

Dimensions	600(H)*200(ϕ)mm
Inlet/Outlet Ports	1 in 6 out
Cable Diameter	ϕ10mm-ϕ30mm
Max. Capacity	288
No. of Splice Tray	8
No. of Splice	36*8
Adapter Capacity	6*6
Material	PP+GF
Packing	2pcs/carton,62.5*30.5*53cm,13.37KGS

KD-25059


480 Cores

Dimensions	460(H)*230(ϕ)mm
Inlet/Outlet Ports	2 in 2 out
Cable Diameter	ϕ7mm-ϕ24mm
Max. Capacity of Core Single	480
No. of Splice Tray	40
No. of Splice	12*40
Material	PP+GF
Packing	2pcs/carton, 65.5*30.5*51.5cm, 16.3KGS

KD-25058

240/480 Cores

Dimensions	530(H)*223(ϕ)mm	
Capacity	240/480	
Adapter Qty.	48/NA	
Inlet/Outlet Ports	2/8	
Heat Shrink Capacity	12*20/12*40	
No. of Splice Tray	20/40	
Packing	2pcs/carton 65.5*30.5*51.5cm 15.5KGS	2pcs/carton 65.5*30.5*51.5cm 12.5KGS

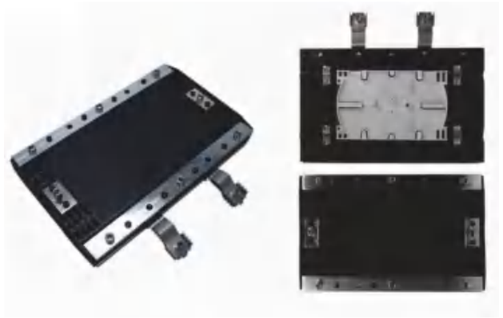

KD-2532

12 Cores

Dimensions	248*156*33mm
Max Inlet Port Dimension	15mm
Inlet/Outlet Port	2 in 2 out
Max. Capacity	12
Max. No. of Splice Tray	1
Packing	20pcs/carton,44*29*40cm,22.5KGS



KD-2533

12 Cores

Dimensions	300*120*70mm
Inlet/Outlet Ports	1 in 1 out
Max. Capacity	24
No. of Splice Tray	2
No. of Splice	12*2
Material	ABS
Packing	25pcs/carton,69*32*42cm,15KGS



KD-25011

48 Cores

Dimensions	405*150*70mm
Max Inlet Port Dimension	15mm
Inlet/Outlet Port	2 in 2 out
Max. Capacity	48
Max. No. of Splice Tray	4
Packing	10pcs/carton,54.5*45*39.5cm,20KGS



KD-25016

48 Cores

Dimensions: 360*180*85mm	Max. Inlet Port Dimension: 15mm
Inlet/Outlet Port: 3 in 3 out	Max. Capacity: 48
Max. No. of Splice Tray: 4	
Packing: 10pcs/carton,54.5*43.5*48.5cm,21.45KGS	



KD-25017

96 Cores

Dimensions: 470*155*105mm	Capacity: 96 Cores
Inlet/Outlet Ports: 2 in 2 out	Heat Shrink Capacity: 96
No. of Splice Tray: 4	
Packing: 6pcs/carton,52*39*38cm,16.55KGS	

KD-25094/-3/-4

144 Cores



KD-25094 KD-25094-3 KD-25094-4

	KD-25094	KD-25094-3	KD-25094-4
Dimensions	460*190*115mm		
Inlet/Outlet Ports	2 in 2 out	3 in 3 out	4 in 4 out
Max. Capacity	144	144	144
Material	PC/PP	PC/PP	PC/PP
Packing	10pcs/carton,62*48*42cm,23KGS		





KD-25093 KD-25093-2 KD-25093-3 KD-25093-4 KD-25093-5

KD-25093/-2/-3/-4/-5

4/6/8/12/16/32 Cores


	KD-25093	KD-25093-2	KD-25093-3	KD-25093-4	KD-25093-5
Dimensions	210*105*95mm	210*105*95mm	210*105*95mm	370*145*120mm	396*223*90mm
Inlet/Outlet Ports	1 in 4 out	1 in 6 out	1 in 8 out	1 in 12 out	1 in 16 out
Max. Capacity	4	6	8	12	32
PLC Type	Mini PLC	Mini PLC	Mini PLC	Mini PLC	Mini PLC



KD-2586-8S/16S

8/16 Cores

Dimensions	600*200*90mm
Inlet/Outlet Ports	3 in 16 out
PLC Type	Mini PLC
Special Feature	2 Door

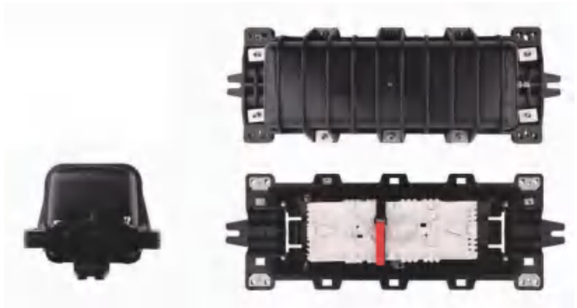

KD-25081

144 Cores


Dimensions	640*210*175mm
Capacity	144 Cores
Inlet/Outlet Ports	2 in 2 out
Heat Shrink Capacity	144
Packing	4pcs/carton,68*49*41cm,23.83KGS



KD-25082

96 Cores

Dimensions	450*125mm
Capacity	96 Cores
Inlet/Outlet Ports	2 in 2 out
Heat Shrink Capacity	96
No. of Splice Tray	4

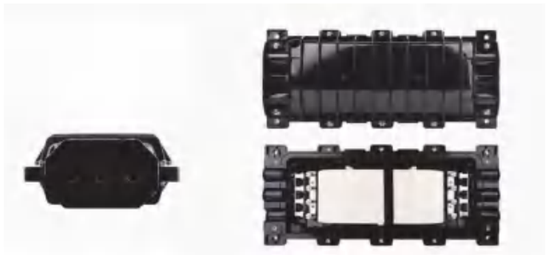

KD-25045

288 Cores


Dimensions	550*235*115mm
Capacity	288 Cores
Inlet/Outlet Ports	3 in 3 out
Heat Shrink Capacity	288



KD-25035

144 Cores

Dimensions: 445*170*100mm	
Inlet/Outlet Ports: 2 in 2 out	
Max. Capacity: 144	No. of Splice Tray: 24
No. of Splice: 6*24	Material: PP
Packing: 20pcs/carton,70.5*47*55cm,26KGS	

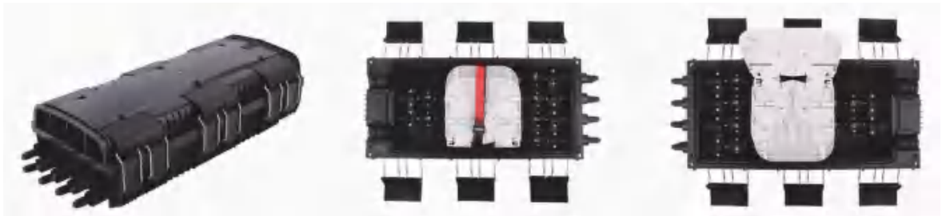

KD-25092

96 Cores

Dimensions: 410*200*117mm	Capacity: 96 Cores
Inlet/Outlet Ports: 2 in 8 out	Heat Shrink Capacity: 4
No. of Splice Tray: 24*4	
Packing: 6pcs/carton,50*48*52cm,19.74KGS	